

Automation for a Changing World

Delta AC Servo Drive ASDA-B2 Series



www.deltaww.com


 **DELTA**
Smarter. Greener. Together.

High Precision. High Response. Cost Effective.

Delta Electronics' new high-performance, cost-effective ASDA-B2 series servo motors and drives meet the requirements for general-purpose machine tools and enhance the competitive advantage of servo systems.

The power rating of the ASDA-B2 series ranges from 0.1kW to 3kW. The superior features of this series emphasize built-in functions for general-purpose applications and saving the cost of mechatronics integration. Delta's ASDA-B2 makes it convenient to complete the setting of assembly, wiring and operation. The ASDA-B2 also provides different control modes for different applications.


Transporting and Conveying Equipment

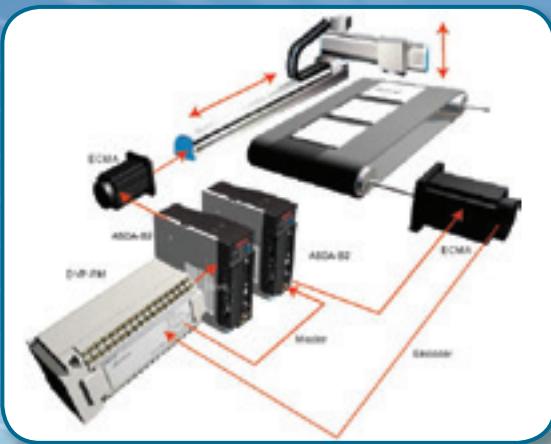

Electric Discharge Machines (EDM)



Cutting Machines

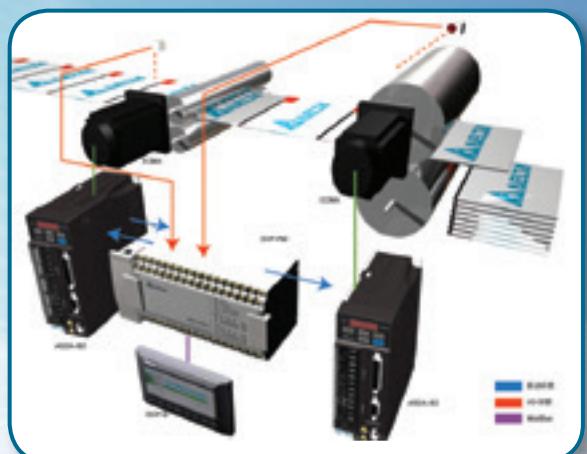

Sawing Machines

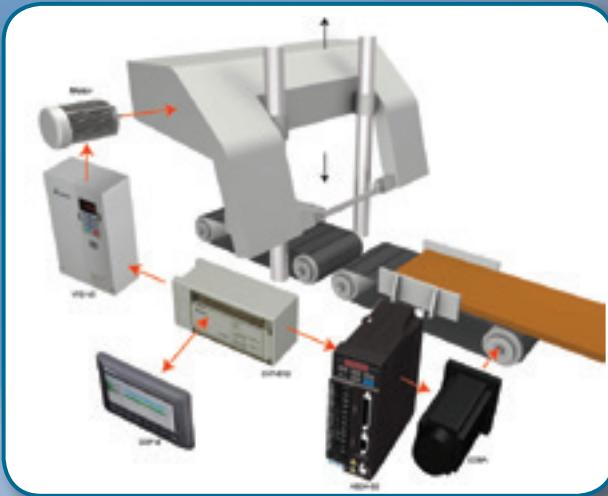


Table of Contents

-
- 3 Features
 - 5 Model Explanation
 - 6 Product Line-up
 - 7 Part Names and Functions
 - 9 Standard Connection Examples
 - 12 Selection of Regenerative Resistor
 - 12 Safety Information
 - 13 Servo Drive Specifications
 - 15 Servo Drive Dimensions
 - 19 Servo Motor Specifications
 - 23 Servo Motor Dimensions
 - 23 Speed-Torque Curve (T-N Curves)
 - 27 Optional Accessories
 - 33 Accessories Combinations




Features


Implements High Precision Positioning Control

- ▶ ASDA-B2 series servo drives support 20-bit and 17-bit encoders. The series satisfies the demand of high-precision positioning control and stable operation at lower speeds.
- ▶ Applying the encoder with a higher resolution can reduce the cogging torque and improve the motor's precision.



2500ppr of Torque Ripple

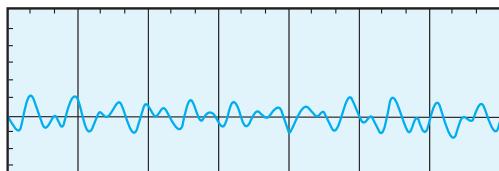

17-bit of Torque Ripple

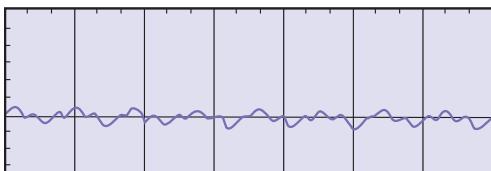


- ▶ Outstanding performance with higher speed: Up to 550Hz frequency response and settling time is below 1ms.
- ▶ 10ms acceleration time from -3000r/min to 3000r/min when running without load.

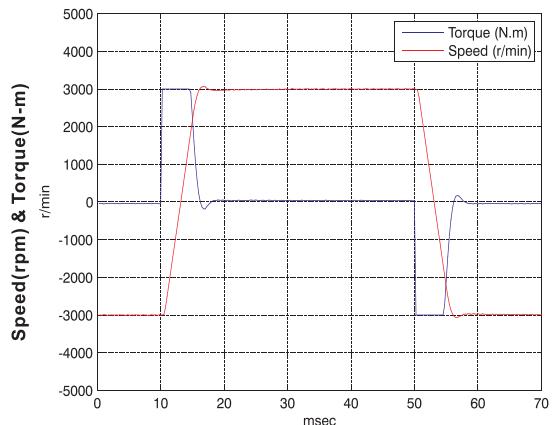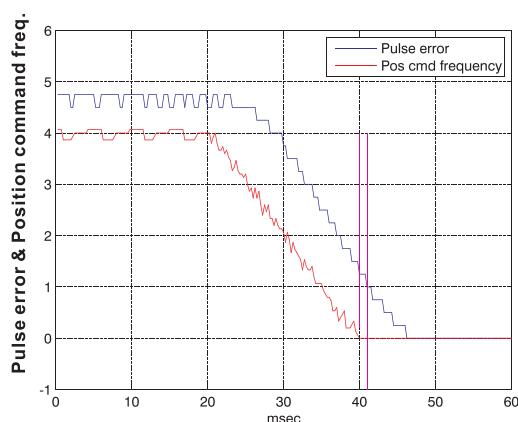


Example: Servo motor frame sizes 60mm and 400W

Satisfies a Variety of Industry Demands

- ▶ Three control modes available: Built-in position, Speed, and Torque. (Speed and Torque mode can be controlled by internal parameters or analog voltage.)
- ▶ High-speed differential command (up to 4Mpps) for high precision positioning control.
- ▶ Three notch filters are provided to suppress the mechanical resonance efficiently and make the system operate more smoothly.
- ▶ Lead friction compensation parameter is specified for the application of circular interpolation, Z-axis motion and ball screw to reduce the loading of the controller.
- ▶ For bar feeders and other equipment requiring high torque output, motor protection parameters are offered to protect the mechanical system.


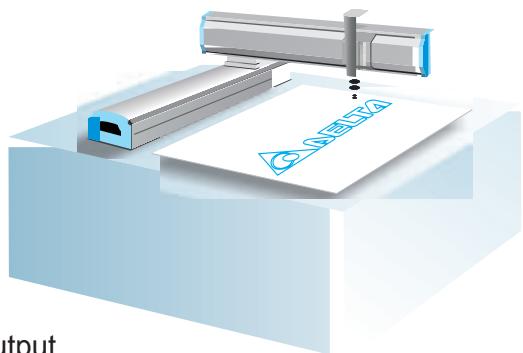


Offers Easy-To-Install Solution For Simple Start-Up

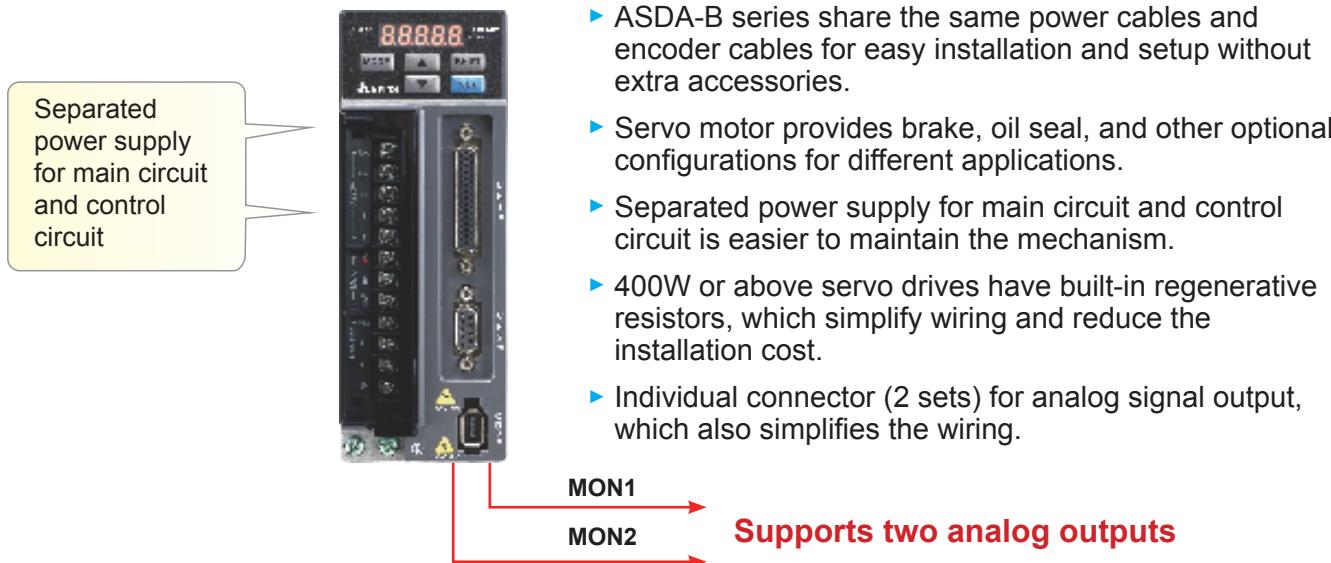

Fulfils Easy-To-Use Requirements For Versatile Operation


- ▶ User-friendly motor sizing software allows users to select the motor.
- ▶ ASDA-Soft configuration software (tuning software) is provided to meet performance requirements quickly.
- ▶ Easy-to-use digital keypad is ideal for setting parameters and enables users to directly monitor the servo drive and servo motor.
- ▶ Specific software communication cable ASD-CNUS0A08 (Optional) can improve communication quality and convenience of operation. (please refer to optional accessories on page 28)

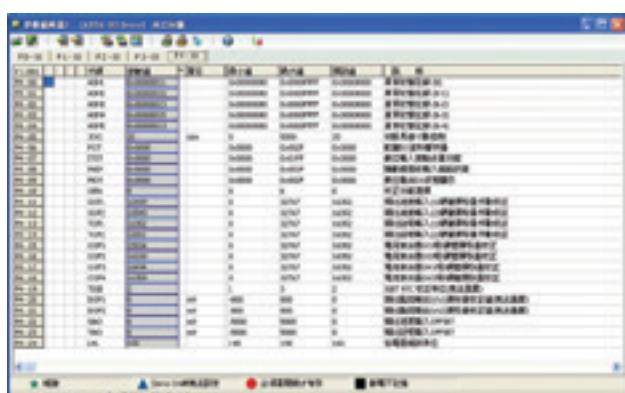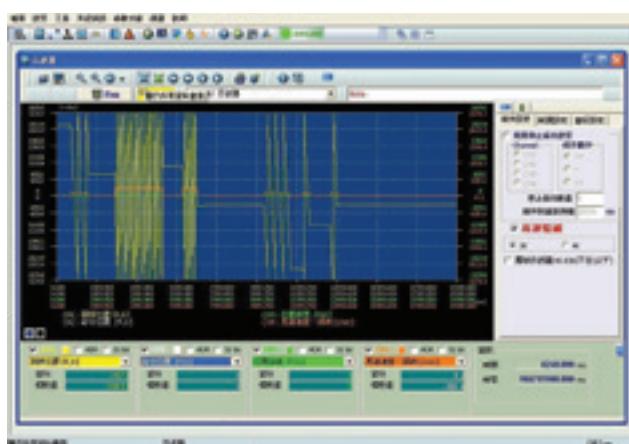


- ▶ On-line monitoring function for 4 channels (similar to a digital oscilloscope) is available. The monitoring data can be 16-bit (4 channels) and 32-bit (2 channels).
- ▶ Multi-functional parameter editor enables users to edit, modify, upload / download and print desired parameters in real time.

Model Explanation

ASDA-B2 Series Servo Drives

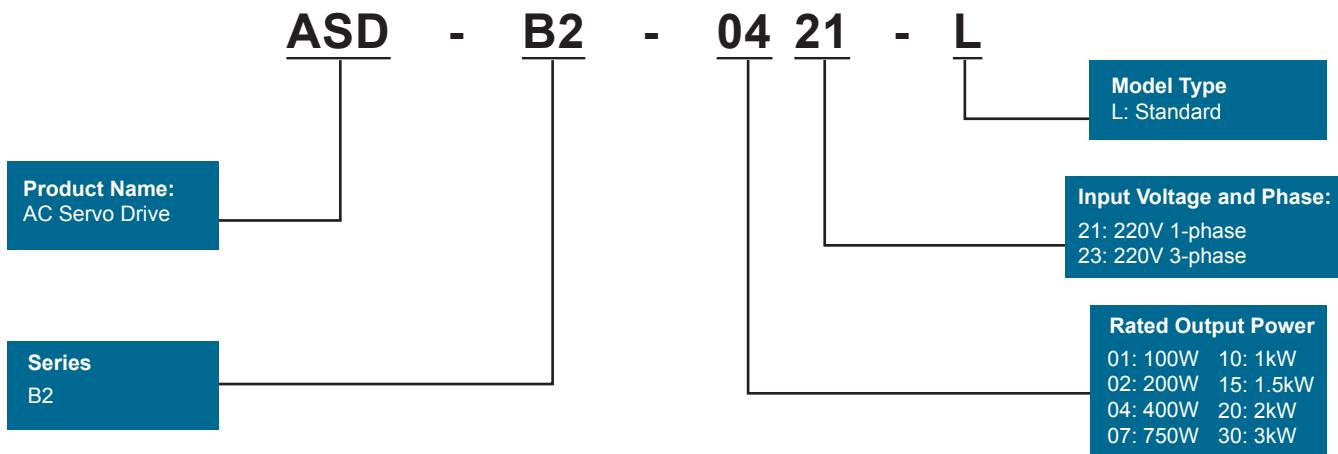

ECMA Series Servo Motors

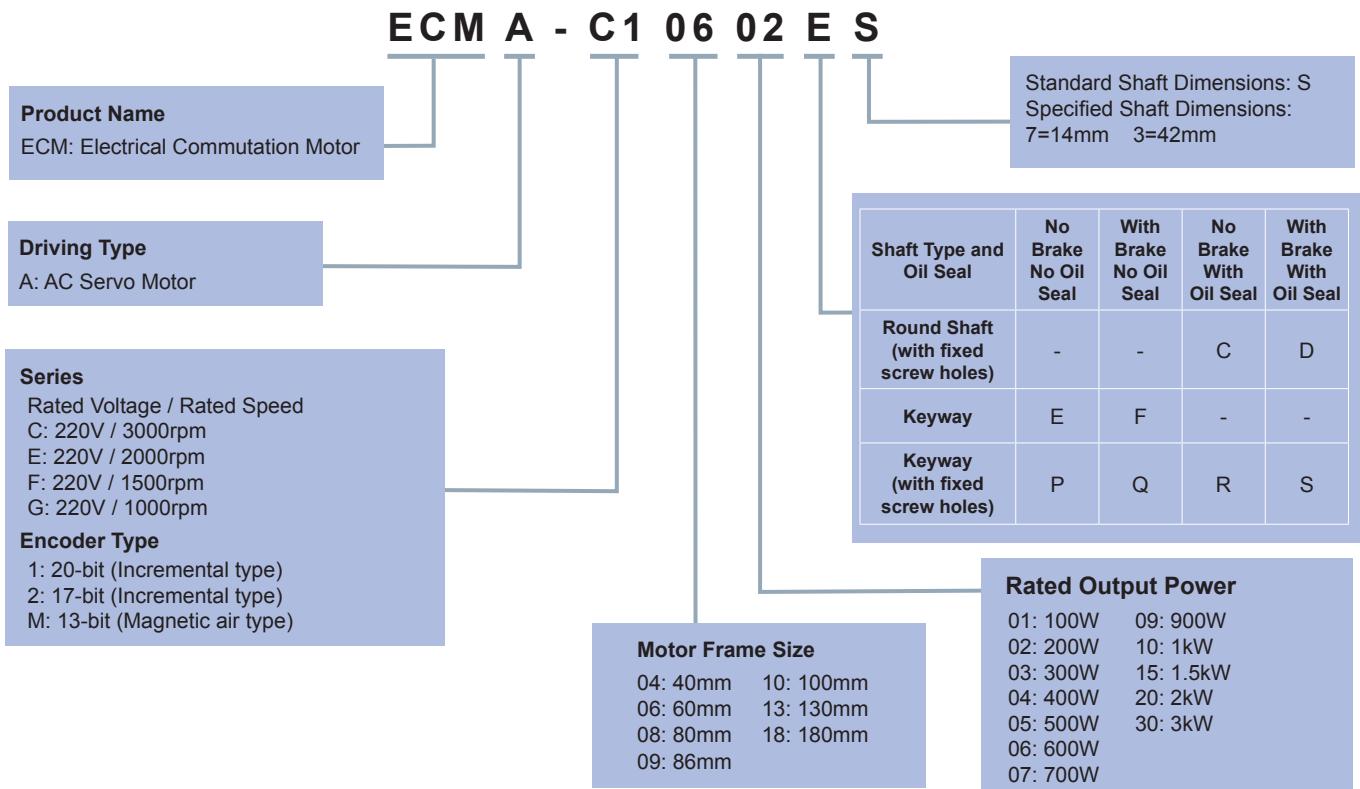

Product Line-up

Servo Drive							
	0.1kW	200W	400W	750W	1.0kW	1.5kW	2kW
	ASD-B2-0121-L	ASD-B2-0221-L	ASD-B2-0421-L	ASD-B2-0721-L	ASD-B2-1021-L	ASD-B2-1521-L	ASD-B2-2023-L
	ASD-B2-3023-L						

Servo Motor								
	ECMA-C△0401□S	ECMA-C△0602□S	ECMA-C△0604□S	ECMA-C△0807□S	ECMA-C△1010□S	ECMA-C△1020□S	ECMA-E△1830□S	
			ECMA-C△0604□H	ECMA-C△0807□H	ECMA-E△1310□S	ECMA-F△1313□S	ECMA-F△1830□S	
			ECMA-C△0804□7	ECMA-G△1306□S	ECMA-G△1309□S	ECMA-E△1320□S	ECMA-E△1835□S	
			ECMA-E△1305□S	ECMA-GM1306PS	ECMA-GM1309PS	ECMA-E△1820□S	ECMA-C△1330□4	
			ECMA-G△1303□S	ECMA-C△0907□S	ECMA-C△0910□S	ECMA-F△1318□S		
					ECMA-E△1315□S			

Note:

1. (□) in the model names represent shaft end/brake or the number of oil seals.

2. (△) in the model names encoder types (△ =1: Incremental encoder, 20-bit; △ =2:Incremental encoder, 17-bit).

Part Names and Functions

LED Display

- The 5-digit, 7-segment LED displays the servo status or fault codes.

Charge LED

- A lit LED indicates that either power is connected to the servo drive or a residual charge is present in the drive's internal power components.

Operation Panel

- Function keys used to perform status display, monitor and diagnostic, function and parameter setting.

Function Keys:

MODE: Mode selection

SHIFT: For shifting the cursor to the left

▲ : For increasing values

▼ : For decreasing values

SET: For storing data

Control Circuit Terminal (L1c, L2c)

- Used to connect 200~230 V_{AC}, 50/60Hz single-phase or three-phase V_{AC} supply.

Main Circuit Terminal (R, S, T)

- Used to connect 200~230 V_{AC}, 50/60Hz commercial power supply.

Servo Motor Output (U, V, W)

- Used to connect the servo motor. Never connect the output terminal to the main circuit power as the AC servo drive may be damaged beyond repair if incorrect cables are connected to the output terminals.

Regenerative Resistor

- When using an external resistor, connect it to P₊ and C, and ensure an open circuit between P₊ and D.
- When using an internal resistor, ensure the circuit is closed between P₊ and D, and the circuit is opened between P₊ and C.
- When using the external braking unit, connect the braking unit to P₊ and ⊖, and ensure an open circuit between P₊ and D, and P₊ and C.
- When using the external brake module, please connect it to P and ⊖.

Ground Terminal





I/O Interface

- Used to connect Delta's DVP series PLC or other external controllers for controlling I/O signals.

Motor Encoder Interface

- Used to connect the encoder.

Serial Communication Port

- Used to connect PLC, HMI, and other controllers for RS-485/RS-232 serial communication.

Reserved

Analog Voltage Output Terminal

- Used to provide two analog monitor outputs, MON1 and MON2.

Heatsink




- Used to secure servo drive and for heat dissipation.



Please note that this only introduces servo drive's basic functions. Specific models may have different functions.


Wiring

Position (Pt) Control Mode (for Pulse Command Input)

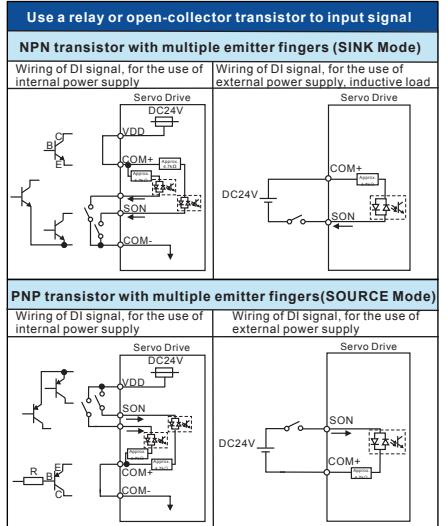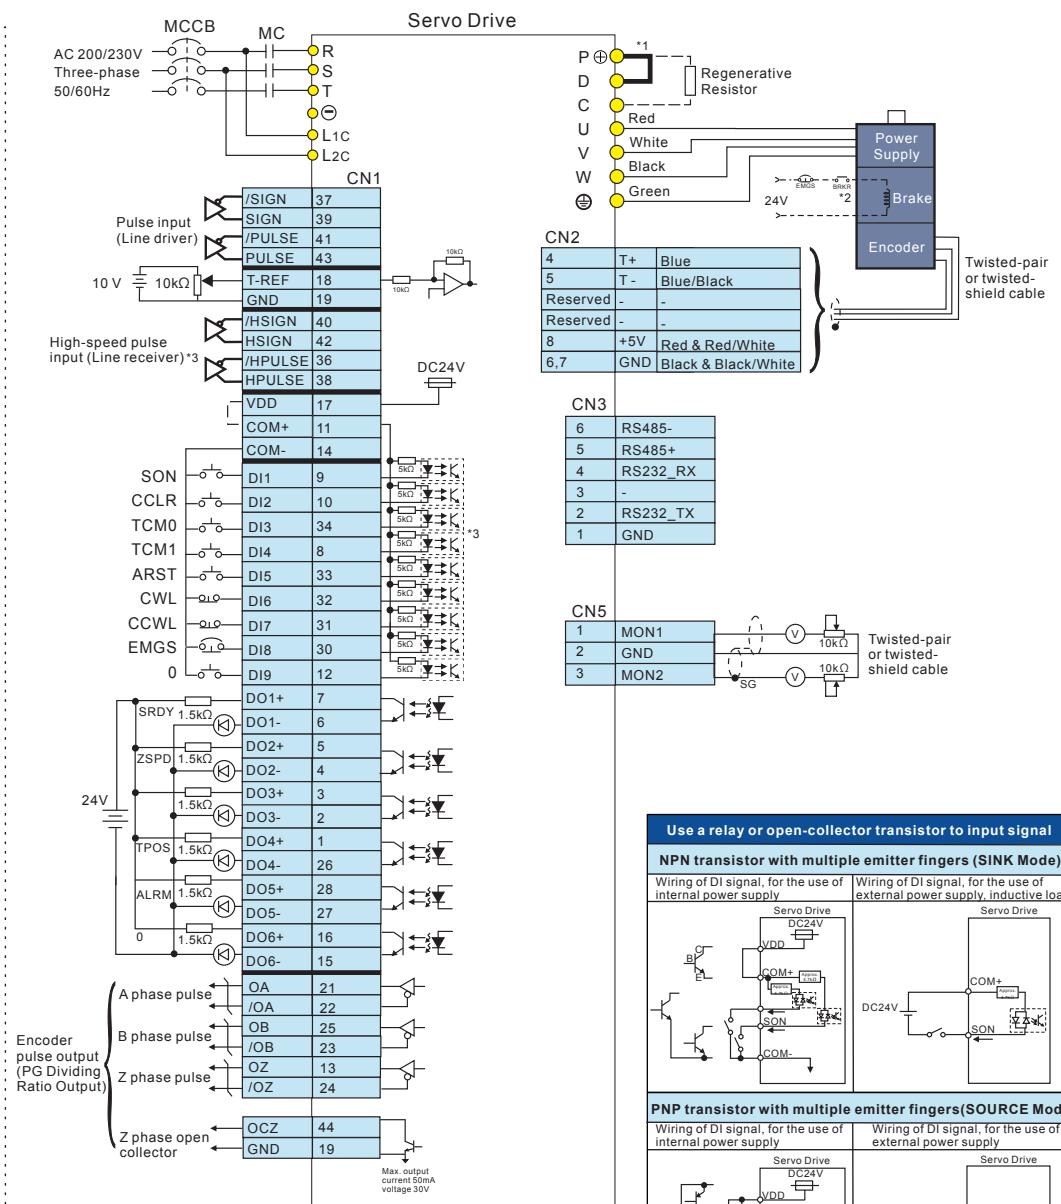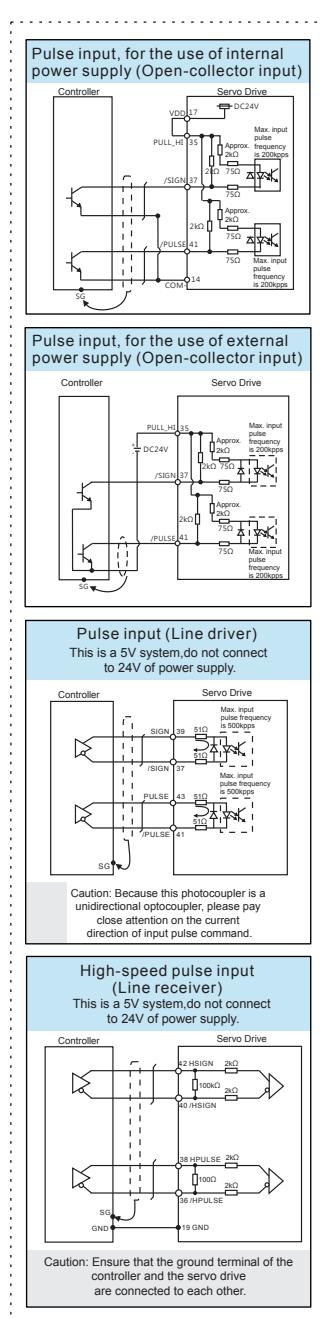


Caution: Do not use dual power supply. Failure to observe this caution may damage the servo drive.

Speed (S) Control Mode

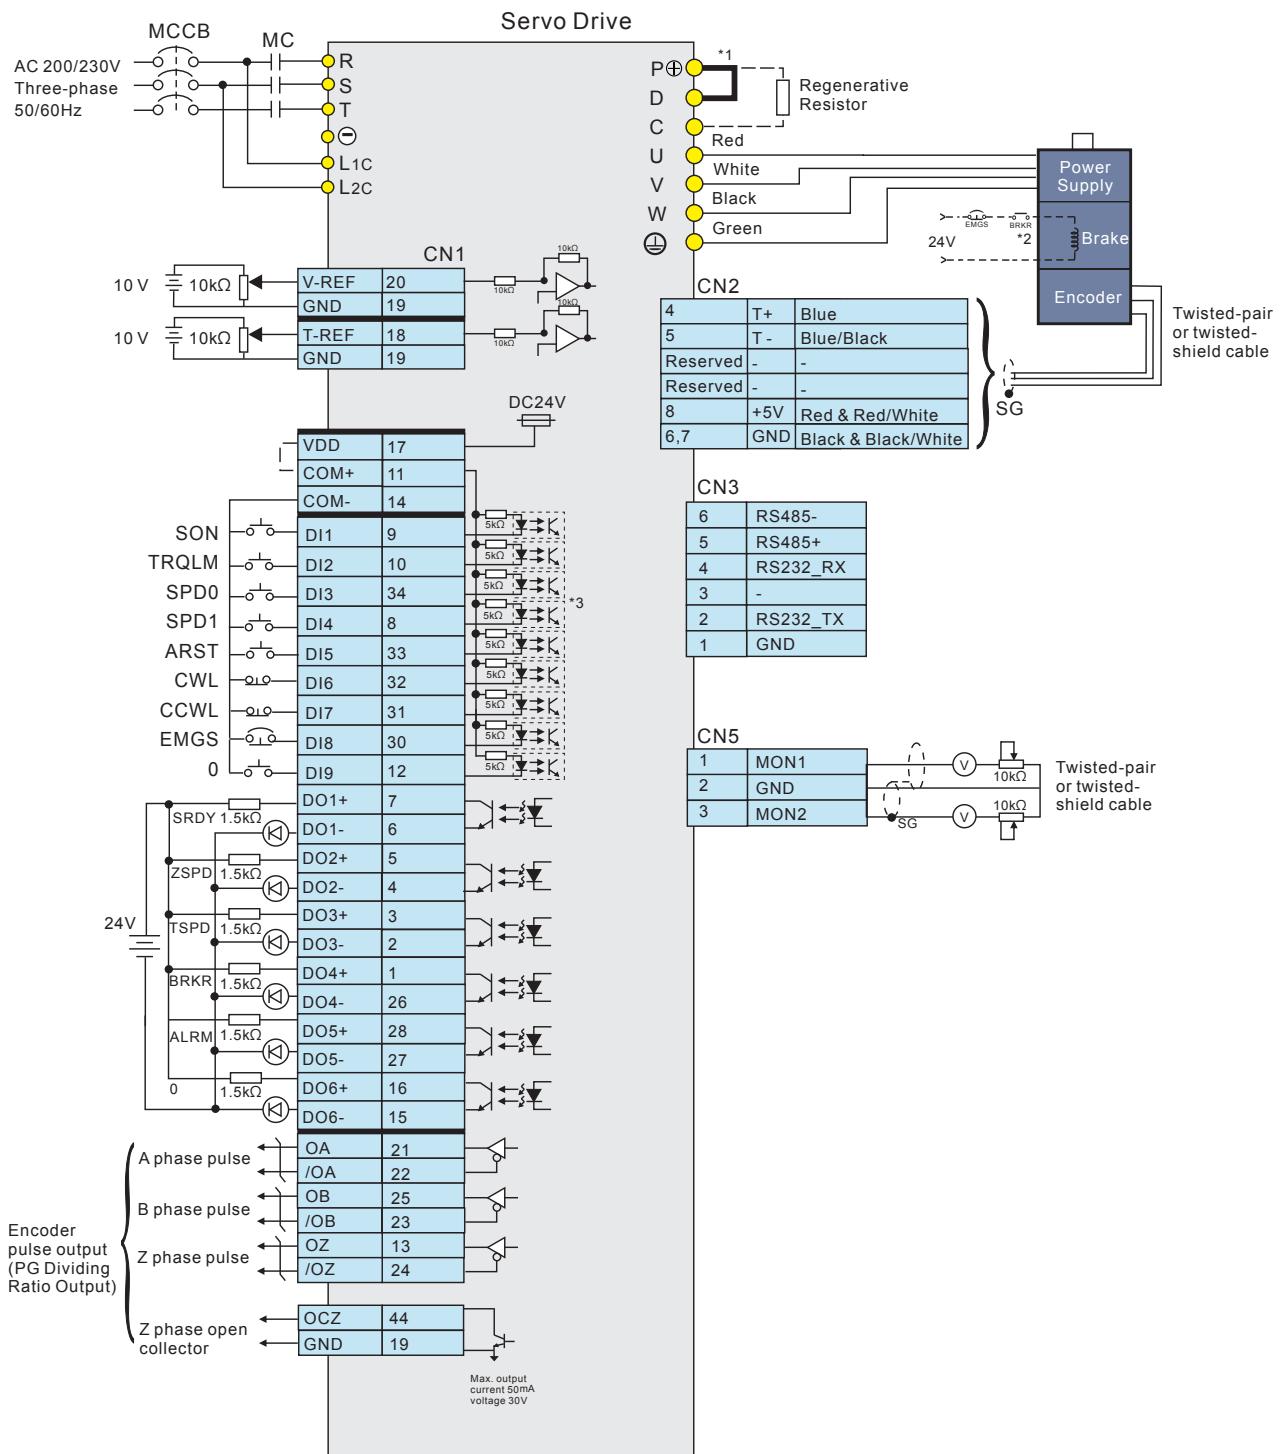

Wiring

Torque (T) Control Mode

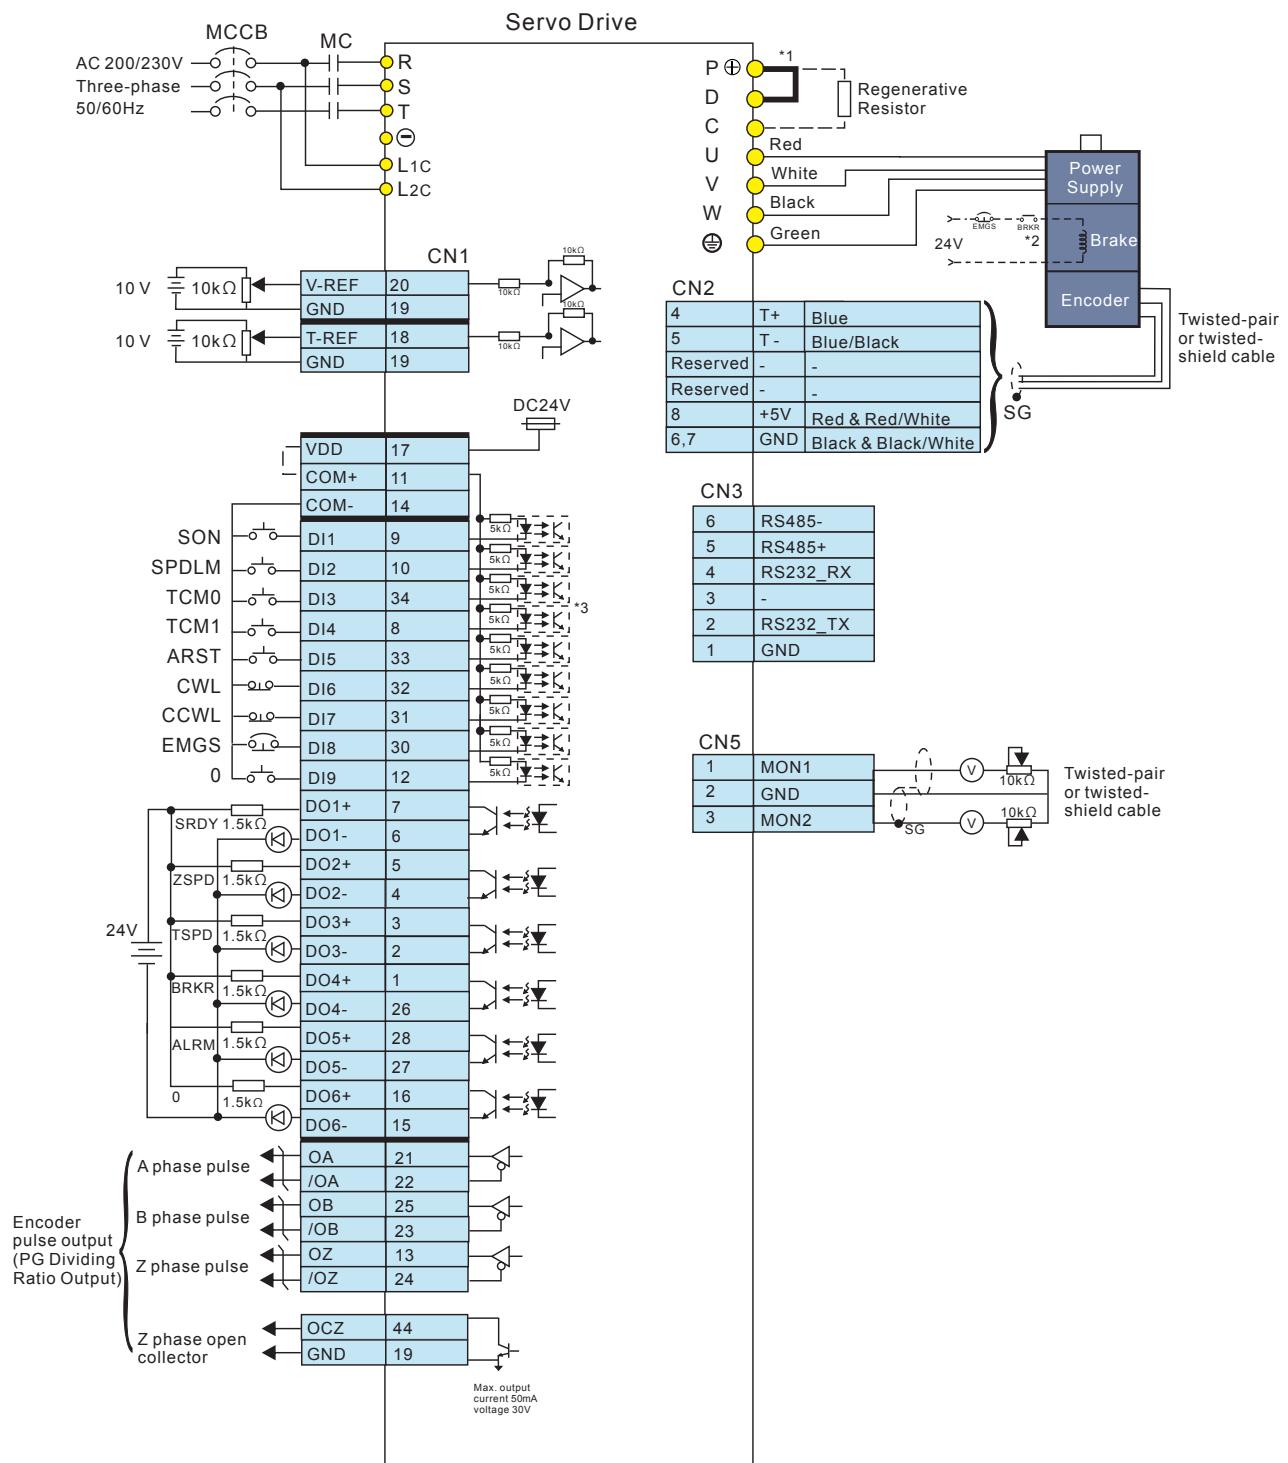

Selection of Regenerative Resistor

Servo Drive (kW)	Recommended Specifications for Built-in Regenerative Resistor		The capacity of built-in regenerative resistor (Watt)	Min. Allowable Resistance (Ohm)
	Resistance (Ohm) (parameter P1-52)	Capacity (Watt) (parameter P1-53)		
0.1	--	--	--	60Ω
0.2	--	--	--	60Ω
0.4	100Ω	60W	30W	60Ω
0.75	100Ω	60W	30W	60Ω
1.0	40Ω	60W	30W	30Ω
1.5	40Ω	60W	30W	30Ω
2.0	20Ω	100W	50W	15Ω
3.0	20Ω	100W	50W	15Ω

Note:

- 1) 100W ~ 200W of B2 servo drives have no built-in regenerative resistor.
- 2) When the fault, ALE05 (Regeneration Error) occurs, please increase the regenerative resistor capacity or decrease the regenerative resistor resistance (the regenerative resistor resistance should not be less than the minimum allowable resistance listed in the above table.)
- 3) If the issue persists, please purchase regenerative resistor module.
- 4) When connecting to regenerative resistor in parallel, make sure that the total resistance value of the regenerative resistors is not less than the minimum allowable resistance listed in the above table.

Safety Information

Global Standards	ASDA-B2 series is designed to fully comply with demanding international standards, such as IEC and EN for all fields of industrial automation technology.	
EMC Standard	EN61000-4-6	Level 3
	EN61000-4-3	Level 3
	EN61000-4-2	Level 2 and Level 3
	EN61000-4-4	Level 3
	EN61000-4-8	Level 4
	EN61000-4-5	Level 3
Conducted & Radiated Emissions	Complies with EN550011 Class A Group 1, with external EMC filter	
CE Marking	CE recognized. Complies with Directive 2006/95/EC of the European Parliament and EMC Directive 2004/108/EC.	
Protection Degree	IEC/EN50178, IEC/EN60529 IP20	
Vibration	1 G less than 20 Hz, 0.6 G 20 to 50 Hz. Complies with IEC/EN50178	
Shock	15gn 11 ms. Complies with IEC/EN60028-2-27	
Pollution Degree	Degree 2. Complies with IEC/EN61800-5-1	
Ambient Temperature	Operating: 0°C ~ 55°C (If operating temperature exceeds the specifications, forced cooling will be required.) Storage: -20°C ~ 65°C	
Cooling Type	ASD-B2-0121-B, ASD-B2-0221-B, ASD-B2-0421-B, ASD-B2-0721-B Natural Air Circulation	
	ASD-B2-1021-B, ASD-B2-1521-B, ASD-B2-2023-B, ASD-B2-3023-B Fan Cooling	
Altitude	Altitude 1000m or lower above sea level	

IEC: International Electrotechnical Commission

EN: Europäischen Normen

EMC: Electromagnetic Compatibility

IP: Ingress Protection Ratings

Specifications

ASDA-B2 Series		100 W	200 W	400 W	750 W	1kW	1.5kW	2kW	3kW											
		01	02	04	07	10	15	20	30											
Power Supply	Phase / Voltage		Three-phase 170 ~ 255V _{AC} , 50/60 Hz ±5%																	
			Single-phase 200 ~ 255V _{AC} , 50/60 Hz ±5%																	
	Input Current (3PH) (Units: Arms)	0.7	1.11	1.86	3.66	4.68	5.9	8.76	9.83											
	Input Current (1PH) (Units: Arms)	0.9	1.92	3.22	6.78	8.88	10.3	-	-											
	Continuous Output Current (Units: Arms)	0.9	1.55	2.6	5.1	7.3	8.3	13.4	19.4											
	Cooling System	Natural Air Circulation				Fan Cooling														
	Encoder Resolution	17-bit (160,000 p/rev)																		
	Main Circuit Control	SVPWM (Space Vector Pulse Width Modulation) Control																		
	Control Mode	Auto / Manual																		
	Regenerative Resistor	None	Built-in																	
Position Control Mode	Max. Input Pulse Frequency	Transmitted by differential: 500K (low speed) / 4Mpps (high-speed) Transmitted by open-collector: 200Kpps																		
	Pulse Type	Pulse + Direction, A phase + B phase, CCW pulse + CW pulse																		
	Command Source	External pulse																		
	Smoothing Strategy	Low-pass filter																		
	E-gear Ratio	Electronic gear N/M multiple N: 1 ~ (2 ²⁶ -1) / M: 1 ~ (2 ³¹ -1) (1/50 < N/M < 25600)																		
	Torque Limit Operation	Set by parameters																		
Speed Control Mode	Feed Forward Compensation	Set by parameters																		
	Analog Input Command	Voltage Range	0 ~ ±10V _{DC}																	
		Input Resistance	10KΩ																	
		Time Constant	2.2 μs																	
	Speed Control Range ¹	1:5000																		
	Command Source	External analog signal / Internal parameters																		
	Smoothing Strategy	Low-pass and S-curve filter																		
	Torque Limit	Set by parameters or via analog input																		
Bandwidth			Maximum 550 Hz																	
			±0.01% at 0 to 100% load fluctuation																	
			±0.01% at ±10% power fluctuation																	
Speed Accuracy ²			±0.01% at 0 °C to 50 °C ambient temperature fluctuation																	

Specifications

ASDA-B2 Series		100W	200W	400W	750W	1kW	1.5kW	2kW	3kW	
		01	02	04	07	10	15	20	30	
Torque Control Mode	Analog Input Command	Voltage Range	0 ~ ±10V _{dc}							
		Input Resistance	10KΩ							
		Time Constant	2.2μs							
Command Source		External analog signal / Internal parameters								
Smoothing Strategy		Low-pass filter								
Speed Limit		Set by parameters or via analog input								
Analog Monitor Output		Monitor signal can set by parameters (Output voltage range: ±8V)								
Digital Input / Output	Input	Servo on, Fault reset, Gain switch, Pulse clear, Zero clamp, Command input reverse control, Torque limit, Speed limit, Speed command selection, Speed/position mode switching, Speed/torque mode switching, Torque/position mode switching, Emergency stop, Positive/negative limit, Forward/reverse operation torque limit, Forward/reverse JOG input, E-gear N selection, Pulse input prohibition								
		Encoder signal output (A, B, Z Line Driver / Z Open collector)								
	Output	Servo on, Servo ready, Zero speed, Target speed reached, Target position reached, Torque limiting, Servo alarm, Brake control, Early warning for overload, Servo warning								
Protective Functions		Over current, Overvoltage, Under voltage, Overheat, Excessive speed deviation, Excessive position deviation, Encoder error, Emergency stop, Communication error, Short-circuit protection of terminal U, V, W and CN1, CN2, CN3								
Communication Interface		RS-232 / RS-485								
Environment	Installation Site	Indoor location (avoid direct sunlight), no corrosive liquid and gas (avoid oil mist, flammable gas, dust)								
	Altitude	Altitude 1000m or lower above sea level								
	Atmospheric Pressure	86 kPa ~ 106 kPa								
	Operating Temperature	0°C ~ 55°C (If operating temperature is above 45°C, forced cooling will be required)								
	Storage Temperature	-20°C ~ 65°C (-4°F to 149°F)								
	Humidity	0 to 90% (non-condensing)								
	Vibration	Under 20 Hz, 9.80665 m/s ² (1G), 20 ~ 50 Hz 5.88 m/s ² (0.6 G)								
	IP Rating	IP20								
	Power System	TN System ¹								
Approvals		IEC/EN 61800-5-1   								

Footnote:

*1. When it is in rated load, the speed ratio is: the minimum speed (smooth operation) / rated speed.

*2. When the command is the rated speed, the velocity correction ratio is: (rotational speed with no load - rotational speed with full load) / rated speed.

*3. TN system: The neutral point of the power system connects to the ground directly. The exposed metal components connect to the ground via the protective earth conductor.



Dimensions


ASD-B2-1021

ASD-B2-0221

ASD-B2-0421

(100W / 200W / 400W)

Weight
1.07 (2.36)

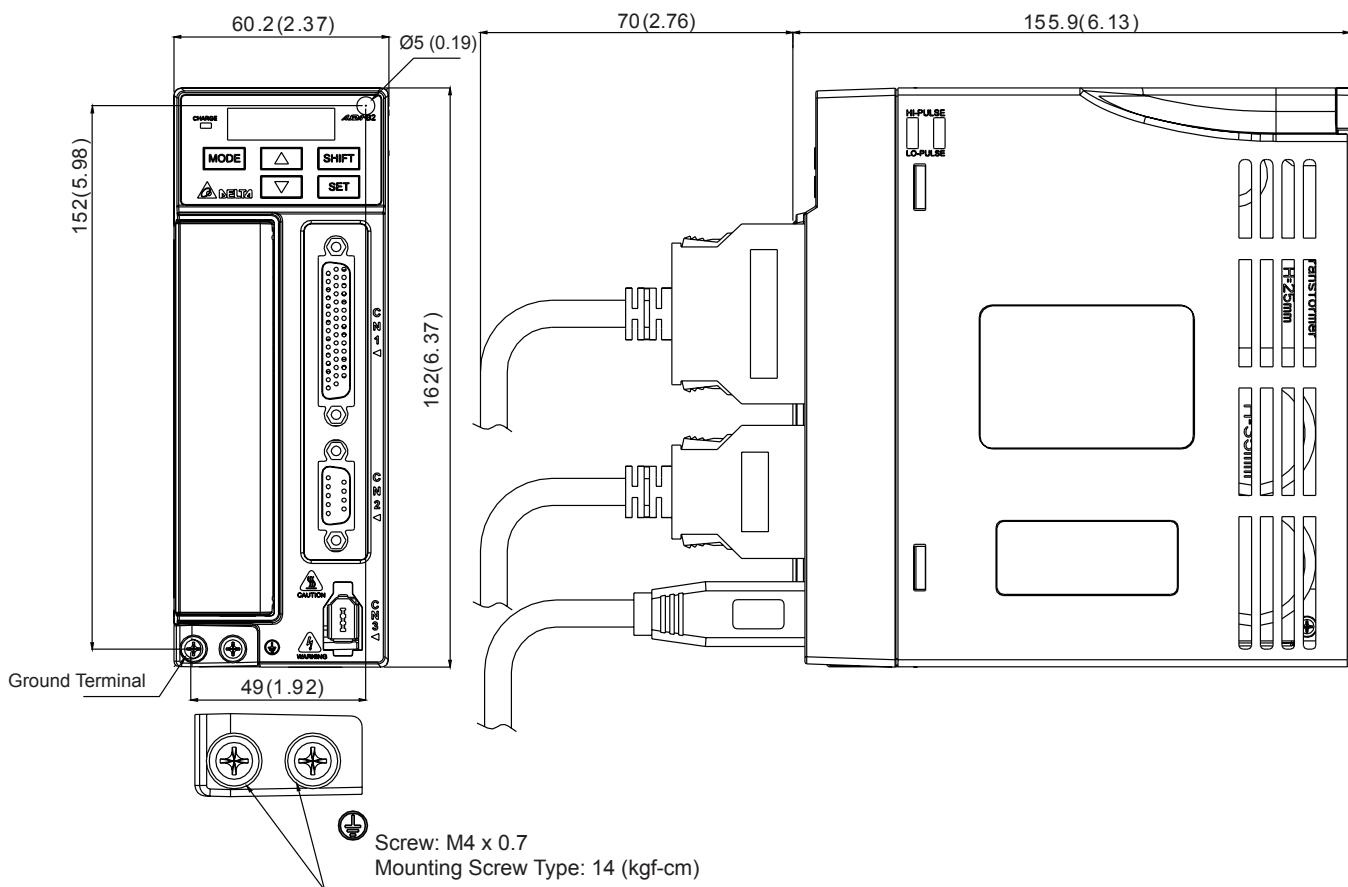


NOTE

- 1) Dimensions are in millimeters (inches); Weights are in kilograms (kg) and (pounds (lbs)).
- 2) Dimensions and weights of the servo drive may be updated without prior notice.

ASD-B2-0721 (750W)

Weight

1.54 (3.40)

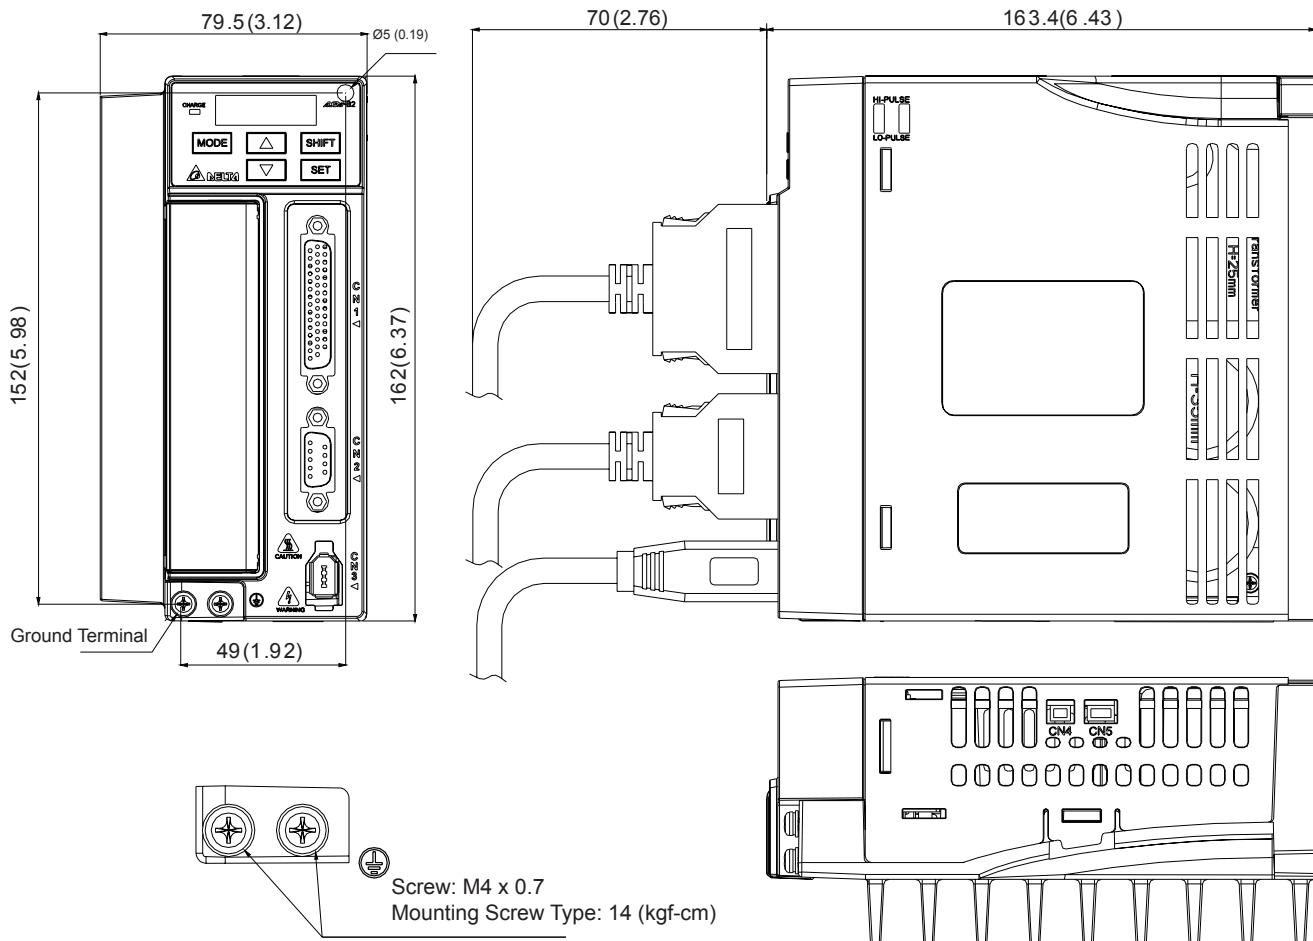

NOTE

- 1) Dimensions are in millimeters (inches); Weights are in kilograms (kg) and (pounds (lbs)).
- 2) Dimensions and weights of the servo drive may be updated without prior notice.

Dimensions


ASD-B2-1021

ASD-B2-1521

(1kW / 1.5kW)

Weight

1.72 (3.79)

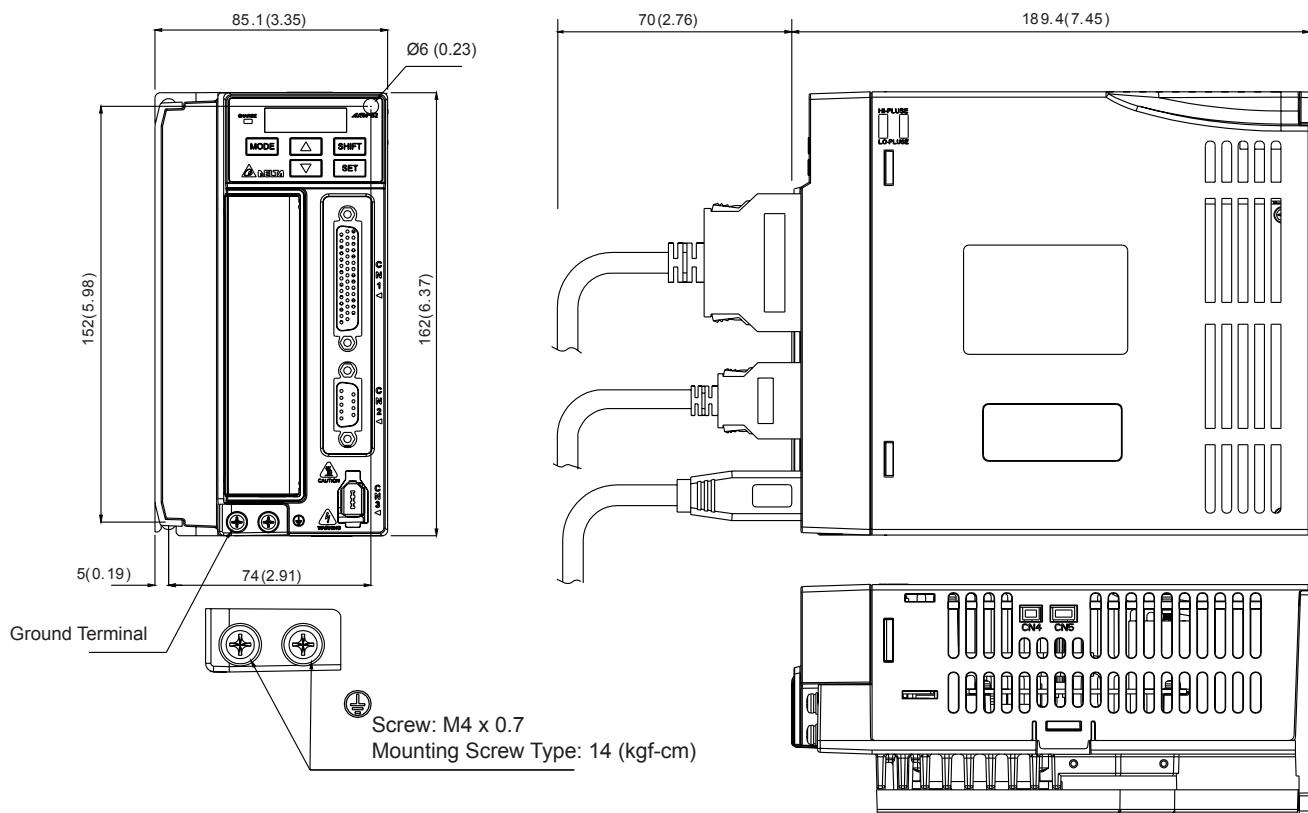


NOTE

- 1) Dimensions are in millimeters (inches); Weights are in kilograms (kg) and (pounds (lbs)).
- 2) Dimensions and weights of the servo drive may be updated without prior notice.

ASD-B2-2023 ASD-B2-3023 (2kW / 3kW)

Weight
2.67 (5.88)

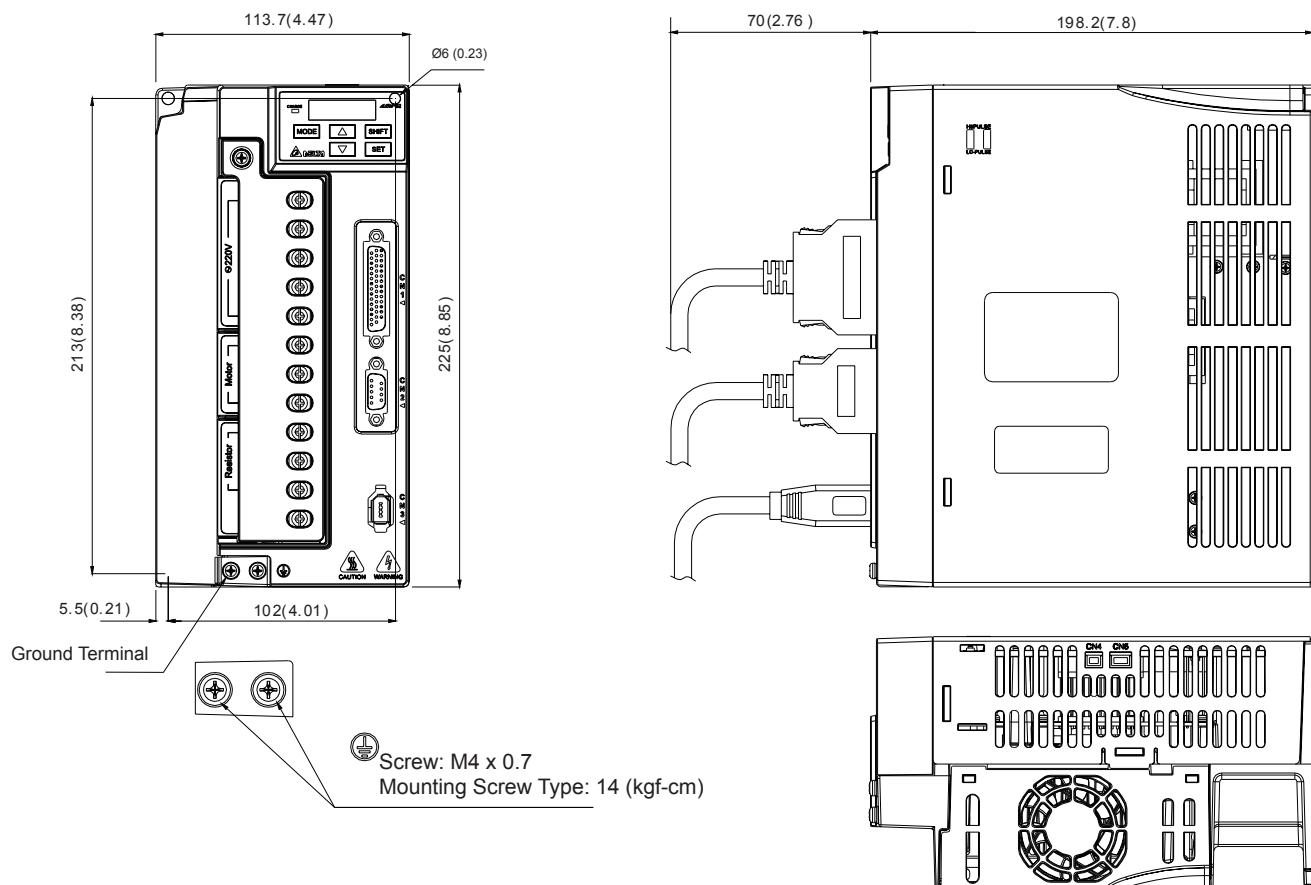

- 1) Dimensions are in millimeters (inches); Weights are in kilograms (kg) and (pounds (lbs)).
 2) Dimensions and weights of the servo drive may be updated without prior notice.

Servo Motor Specifications

Low Inertia Series

Model: ECMA Series	C△04		C△06		C△08		C△09		C△10		C△13
	01	02	04S	04	07	07	10	10	20	30	
Rated power (kW)	0.1	0.2	0.4	0.4	0.75	0.75	1.0	1.0	2.0	3.0	
Rated torque (N·m) ¹	0.32	0.64	1.27	1.27	2.39	2.39	3.18	3.18	6.37	9.55	
Maximum torque (N·m)	0.96	1.92	3.82	3.82	7.16	7.14	8.78	9.54	19.11	28.65	
Rated speed (r/min)	3000					3000		3000		3000	
Maximum speed (r/min)	5000					3000		5000		4500	
Rated current (A)	0.90	1.55	2.6	2.6	5.1	3.66	4.25	7.3	12.05	17.2	
Maximum current (A)	2.70	4.65	7.8	7.8	15.3	11	12.37	21.9	36.15	47.5	
Power rating (kW/s)	27.7	22.4	57.6	24.0	50.4	29.6	38.6	38.1	90.6	71.8	
Rotor inertia (x10 ⁻⁴ kg·m ²)(without brake)	0.037	0.177	0.277	0.68	1.13	1.93	2.62	2.65	4.45	12.7	
Mechanical constant (ms)	0.75	0.80	0.53	0.74	0.62	1.72	1.20	0.74	0.61	1.11	
Torque constant-KT (N·m/A)	0.36	0.41	0.49	0.49	0.47	0.65	0.75	0.44	0.53	0.557	
Voltage constant-KE(mV/(r/min))	13.6	16	17.4	18.5	17.2	24.2	27.5	16.8	19.2	20.98	
Armature resistance (Ohm)	9.30	2.79	1.55	0.93	0.42	1.34	0.897	0.20	0.13	0.0976	
Armature inductance (mH)	24.0	12.07	6.71	7.39	3.53	7.55	5.7	1.81	1.50	1.21	
Electric constant (ms)	2.58	4.3	4.3	7.96	8.36	5.66	6.35	9.3	11.4	12.4	
Insulation class	Class A (UL), Class B (CE)										
Insulation resistance	>100MΩ, 500V _{DC}										
Insulation strength	1.8kV _{AC} , 1sec										
Weight (kg) (without brake)	0.5	1.2	1.6	2.1	3.0	2.9	3.8	4.3	6.2	7.8	
Weight (kg) (with brake)	0.8	1.5	2.0	2.9	3.8	3.69	5.5	4.7	7.2	9.2	
Max. radial shaft load (N)	78.4	196	196	245	245	245	245	490	490	490	
Max. thrust shaft load (N)	39.2	68	68	98	98	98	98	98	98	98	
Power rating (kW/s) (with brake)	25.6	21.3	53.8	22.1	48.4	29.3	37.9	30.4	82	65.1	
Rotor inertia (x10 ⁻⁴ kg·m ²) (with brake)	0.04	0.192	0.30	0.73	1.18	1.95	2.67	3.33	4.95	14.0	
Mechanical constant (ms) (with brake)	0.81	0.85	0.57	0.78	0.65	1.74	1.22	0.93	0.66	1.22	
Brake holding torque [Nt·m (min)] ²	0.3	1.3	1.3	2.5	2.5	2.5	2.5	8	8	10.0	
Brake power consumption (at 20°C) [W]	7.3	6.5	6.5	8.2	8.2	8.2	8.2	18.7	18.7	19.0	
Brake release time [ms (Max)]	5	10	10	10	10	10	10	10	10	10	
Brake pull-in time [ms (Max)]	25	70	70	70	70	70	70	70	70	70	
Vibration grade (μm)	15										
Operating temperature (°C)	0°C to 40°C (32°F to 104°F)										
Storage temperature (°C)	-10°C to 80°C (-14°F to 176°F)										
Operating humidity	20 to 90% RH (non-condensing)										
Storage humidity	20 to 90% RH (non-condensing)										
Vibration capacity	2.5G										
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))										
Approvals											

Footnote:

* 1 Rate torque values are continuous permissible values at 0~40°C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA-04 / 06 / 08 : 250 mm × 250 mm × 6 mm

ECMA-10 : 300 mm × 300 mm × 12 mm

ECMA-13 : 400 mm × 400 mm × 20 mm

ECMA-18 : 550 mm × 550 mm × 30 mm

ECMA-22 : 650 mm × 650 mm × 30 mm

Material type : Aluminum F40, F60, F80, F100, F130, F180, F220

*2 The holding brake is used to hold the motor shaft, not for braking the rotation. Never use it for decelerating or stopping the machine.

Servo Motor Specifications

Medium / High Inertia Series

Model: ECMA Series	EΔ13				EΔ18			GΔ13		
	05	10	15	20	20	30	35	03	06	09
Rated power (kW)	0.5	1.0	1.5	2.0	2.0	3.0	3.5	0.3	0.6	0.9
Rated torque (N·m) ¹	2.39	4.77	7.16	9.55	9.55	14.32	16.71	2.86	5.73	8.59
Maximum torque (N·m)	7.16	14.3	21.48	28.65	28.65	42.97	50.13	8.59	17.19	21.48
Rated speed (r/min)				2000					1000	
Maximum speed (r/min)				3000					2000	
Rated current (A)	2.9	5.6	8.3	11.01	11.22	16.1	19.2	2.5	4.8	7.5
Maximum current (A)	8.7	16.8	24.9	33.03	33.66	48.3	57.6	7.5	14.4	22.5
Power rating (kW/s)	7.0	27.1	45.9	62.5	26.3	37.3	50.8	10.0	39.0	66.0
Rotor inertia (x10-4kg·m ²)(without brake)	8.17	8.41	11.18	14.59	34.68	54.95	54.95	8.17	8.41	11.18
Mechanical constant (ms)	1.91	1.51	1.10	0.96	1.62	1.06	1.08	1.84	1.40	1.06
Torque constant-KT (N·m/A)	0.83	0.85	0.87	0.87	0.85	0.89	0.87	1.15	1.19	1.15
Voltage constant-KE(mV/(r/min))	30.9	31.9	31.8	31.8	31.4	32.0	32	42.5	43.8	41.6
Armature resistance (Ohm)	0.57	0.47	0.26	0.174	0.119	0.052	0.052	1.06	0.82	0.43
Armature inductance (mH)	7.39	5.99	4.01	2.76	2.84	1.38	1.38	14.29	11.12	6.97
Electric constant (ms)	12.96	12.88	15.31	15.86	23.87	26.39	26.39	13.55	13.50	16.06
Insulation class					Class A (UL), Class B (CE)					
Insulation resistance					>100MΩ, 500V _{DC}					
Insulation strength					1.8kV _{AC} , 1sec					
Weight (kg) (without brake)	6.8	7.0	7.5	7.8	13.5	18.5	18.5	6.8	7.0	7.5
Weight (kg) (with brake)	8.2	8.4	8.9	9.2	17.5	22.5	22.5	8.2	8.4	8.9
Max. radial shaft load (N)	490	490	490	490	1176	1470	490	490	490	490
Max. thrust shaft load (N)	98	98	98	98	490	490	98	98	98	98
Power rating (kW/s) (with brake)	6.4	24.9	43.1	57.4	24.1	35.9	48.9	9.2	35.9	62.1
Rotor inertia (x10-4kg·m ²) (with brake)	8.94	9.14	11.90	15.88	37.86	57.06	57.06	8.94	9.14	11.9
Mechanical constant (ms) (with brake)	2.07	1.64	1.19	1.05	1.77	1.10	1.12	2.0	1.51	1.13
Brake holding torque [Nt·m (min)] ²	10.0	10.0	10.0	10.0	25.0	25.0	25.0	10.0	10.0	10.0
Brake power consumption (at 20°C) [W]	19.0	19.0	19.0	19.0	20.4	20.4	20.4	19.0	19.0	19.0
Brake release time [ms (Max)]	10	10	10	10	10	10	10	10	10	10
Brake pull-in time [ms (Max)]	70	70	70	70	70	70	70	70	70	70
Vibration grade (μm)					15					
Operating temperature (°C)					0°C to 40°C (32°F to 104°F)					
Storage temperature (°C)					-10°C to 80°C (-14°F to 176°F)					
Operating humidity					20 to 90% RH (non-condensing)					
Storage humidity					20 to 90% RH (non-condensing)					
Vibration capacity					2.5G					
IP Rating					IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))					
Approvals					<img alt="CE, UL, CSA, RoHS, ISO 9001, ISO 14001, OHSAS 18001, IEC 60068-2-27, IEC 60068-2-29, IEC 60068-2-32, IEC 60068-2-33, IEC 60068-2-34, IEC 60068-2-35, IEC 60068-2-36, IEC 60068-2-37, IEC 60068-2-38, IEC 60068-2-39, IEC 60068-2-40, IEC 60068-2-41, IEC 60068-2-42, IEC 60068-2-43, IEC 60068-2-44, IEC 60068-2-45, IEC 60068-2-46, IEC 60068-2-47, IEC 60068-2-48, IEC 60068-2-49, IEC 60068-2-50, IEC 60068-2-51, IEC 60068-2-52, IEC 60068-2-53, IEC 60068-2-54, IEC 60068-2-55, IEC 60068-2-56, IEC 60068-2-57, IEC 60068-2-58, IEC 60068-2-59, IEC 60068-2-60, IEC 60068-2-61, IEC 60068-2-62, IEC 60068-2-63, IEC 60068-2-64, IEC 60068-2-65, IEC 60068-2-66, IEC 60068-2-67, IEC 60068-2-68, IEC 60068-2-69, IEC 60068-2-70, IEC 60068-2-71, IEC 60068-2-72, IEC 60068-2-73, IEC 60068-2-74, IEC 60068-2-75, IEC 60068-2-76, IEC 60068-2-77, IEC 60068-2-78, IEC 60068-2-79, IEC 60068-2-80, IEC 60068-2-81, IEC 60068-2-82, IEC 60068-2-83, IEC 60068-2-84, IEC 60068-2-85, IEC 60068-2-86, IEC 60068-2-87, IEC 60068-2-88, IEC 60068-2-89, IEC 60068-2-90, IEC 60068-2-91, IEC 60068-2-92, IEC 60068-2-93, IEC 60068-2-94, IEC 60068-2-95, IEC 60068-2-96, IEC 60068-2-97, IEC 60068-2-98, IEC 60068-2-99, IEC 60068-2-100, IEC 60068-2-101, IEC 60068-2-102, IEC 60068-2-103, IEC 60068-2-104, IEC 60068-2-105, IEC 60068-2-106, IEC 60068-2-107, IEC 60068-2-108, IEC 60068-2-109, IEC 60068-2-110, IEC 60068-2-111, IEC 60068-2-112, IEC 60068-2-113, IEC 60068-2-114, IEC 60068-2-115, IEC 60068-2-116, IEC 60068-2-117, IEC 60068-2-118, IEC 60068-2-119, IEC 60068-2-120, IEC 60068-2-121, IEC 60068-2-122, IEC 60068-2-123, IEC 60068-2-124, IEC 60068-2-125, IEC 60068-2-126, IEC 60068-2-127, IEC 60068-2-128, IEC 60068-2-129, IEC 60068-2-130, IEC 60068-2-131, IEC 60068-2-132, IEC 60068-2-133, IEC 60068-2-134, IEC 60068-2-135, IEC 60068-2-136, IEC 60068-2-137, IEC 60068-2-138, IEC 60068-2-139, IEC 60068-2-140, IEC 60068-2-141, IEC 60068-2-142, IEC 60068-2-143, IEC 60068-2-144, IEC 60068-2-145, IEC 60068-2-146, IEC 60068-2-147, IEC 60068-2-148, IEC 60068-2-149, IEC 60068-2-150, IEC 60068-2-151, IEC 60068-2-152, IEC 60068-2-153, IEC 60068-2-154, IEC 60068-2-155, IEC 60068-2-156, IEC 60068-2-157, IEC 60068-2-158, IEC 60068-2-159, IEC 60068-2-160, IEC 60068-2-161, IEC 60068-2-162, IEC 60068-2-163, IEC 60068-2-164, IEC 60068-2-165, IEC 60068-2-166, IEC 60068-2-167, IEC 60068-2-168, IEC 60068-2-169, IEC 60068-2-170, IEC 60068-2-171, IEC 60068-2-172, IEC 60068-2-173, IEC 60068-2-174, IEC 60068-2-175, IEC 60068-2-176, IEC 60068-2-177, IEC 60068-2-178, IEC 60068-2-179, IEC 60068-2-180, IEC 60068-2-181, IEC 60068-2-182, IEC 60068-2-183, IEC 60068-2-184, IEC 60068-2-185, IEC 60068-2-186, IEC 60068-2-187, IEC 60068-2-188, IEC 60068-2-189, IEC 60068-2-190, IEC 60068-2-191, IEC 60068-2-192, IEC 60068-2-193, IEC 60068-2-194, IEC 60068-2-195, IEC 60068-2-196, IEC 60068-2-197, IEC 60068-2-198, IEC 60068-2-199, IEC 60068-2-200, IEC 60068-2-201, IEC 60068-2-202, IEC 60068-2-203, IEC 60068-2-204, IEC 60068-2-205, IEC 60068-2-206, IEC 60068-2-207, IEC 60068-2-208, IEC 60068-2-209, IEC 60068-2-210, IEC 60068-2-211, IEC 60068-2-212, IEC 60068-2-213, IEC 60068-2-214, IEC 60068-2-215, IEC 60068-2-216, IEC 60068-2-217, IEC 60068-2-218, IEC 60068-2-219, IEC 60068-2-220, IEC 60068-2-221, IEC 60068-2-222, IEC 60068-2-223, IEC 60068-2-224, IEC 60068-2-225, IEC 60068-2-226, IEC 60068-2-227, IEC 60068-2-228, IEC 60068-2-229, IEC 60068-2-230, IEC 60068-2-231, IEC 60068-2-232, IEC 60068-2-233, IEC 60068-2-234, IEC 60068-2-235, IEC 60068-2-236, IEC 60068-2-237, IEC 60068-2-238, IEC 60068-2-239, IEC 60068-2-240, IEC 60068-2-241, IEC 60068-2-242, IEC 60068-2-243, IEC 60068-2-244, IEC 60068-2-245, IEC 60068-2-246, IEC 60068-2-247, IEC 60068-2-248, IEC 60068-2-249, IEC 60068-2-250, IEC 60068-2-251, IEC 60068-2-252, IEC 60068-2-253, IEC 60068-2-254, IEC 60068-2-255, IEC 60068-2-256, IEC 60068-2-257, IEC 60068-2-258, IEC 60068-2-259, IEC 60068-2-260, IEC 60068-2-261, IEC 60068-2-262, IEC 60068-2-263, IEC 60068-2-264, IEC 60068-2-265, IEC 60068-2-266, IEC 60068-2-267, IEC 60068-2-268, IEC 60068-2-269, IEC 60068-2-270, IEC 60068-2-271, IEC 60068-2-272, IEC 60068-2-273, IEC 60068-2-274, IEC 60068-2-275, IEC 60068-2-276, IEC 60068-2-277, IEC 60068-2-278, IEC 60068-2-279, IEC 60068-2-280, IEC 60068-2-281, IEC 60068-2-282, IEC 60068-2-283, IEC 60068-2-284, IEC 60068-2-285, IEC 60068-2-286, IEC 60068-2-287, IEC 60068-2-288, IEC 60068-2-289, IEC 60068-2-290, IEC 60068-2-291, IEC 60068-2-292, IEC 60068-2-293, IEC 60068-2-294, IEC 60068-2-295, IEC 60068-2-296, IEC 60068-2-297, IEC 60068-2-298, IEC 60068-2-299, IEC 60068-2-300, IEC 60068-2-301, IEC 60068-2-302, IEC 60068-2-303, IEC 60068-2-304, IEC 60068-2-305, IEC 60068-2-306, IEC 60068-2-307, IEC 60068-2-308, IEC 60068-2-309, IEC 60068-2-310, IEC 60068-2-311, IEC 60068-2-312, IEC 60068-2-313, IEC 60068-2-314, IEC 60068-2-315, IEC 60068-2-316, IEC 60068-2-317, IEC 60068-2-318, IEC 60068-2-319, IEC 60068-2-320, IEC 60068-2-321, IEC 60068-2-322, IEC 60068-2-323, IEC 60068-2-324, IEC 60068-2-325, IEC 60068-2-326, IEC 60068-2-327, IEC 60068-2-328, IEC 60068-2-329, IEC 60068-2-330, IEC 60068-2-331, IEC 60068-2-332, IEC 60068-2-333, IEC 60068-2-334, IEC 60068-2-335, IEC 60068-2-336, IEC 60068-2-337, IEC 60068-2-338, IEC 60068-2-339, IEC 60068-2-340, IEC 60068-2-341, IEC 60068-2-342, IEC 60068-2-343, IEC 60068-2-344, IEC 60068-2-345, IEC 60068-2-346, IEC 60068-2-347, IEC 60068-2-348, IEC 60068-2-349, IEC 60068-2-350, IEC 60068-2-351, IEC 60068-2-352, IEC 60068-2-353, IEC 60068-2-354, IEC 60068-2-355, IEC 60068-2-356, IEC 60068-2-357, IEC 60068-2-358, IEC 60068-2-359, IEC 60068-2-360, IEC 60068-2-361, IEC 60068-2-362, IEC 60068-2-363, IEC 60068-2-364, IEC 60068-2-365, IEC 60068-2-366, IEC 60068-2-367, IEC 60068-2-368, IEC 60068-2-369, IEC 60068-2-370, IEC 60068-2-371, IEC 60068-2-372, IEC 60068-2-373, IEC 60068-2-374, IEC 60068-2-375, IEC 60068-2-376, IEC 60068-2-377, IEC 60068-2-378, IEC 60068-2-379, IEC 60068-2-380, IEC 60068-2-381, IEC 60068-2-382, IEC 60068-2-383, IEC 60068-2-384, IEC 60068-2-385, IEC 60068-2-386, IEC 60068-2-387, IEC 60068-2-388, IEC 60068-2-389, IEC 60068-2-390, IEC 60068-2-391, IEC 60068-2-392, IEC 60068-2-393, IEC 60068-2-394, IEC 60068-2-395, IEC 60068-2-396, IEC 60068-2-397, IEC 60068-2-398, IEC 60068-2-399, IEC 60068-2-400, IEC 60068-2-401, IEC 60068-2-402, IEC 60068-2-403, IEC 60068-2-404, IEC 60068-2-405, IEC 60068-2-406, IEC 60068-2-407, IEC 60068-2-408, IEC 60068-2-409, IEC 60068-2-410, IEC 60068-2-411, IEC 60068-2-412, IEC 60068-2-413, IEC 60068-2-414, IEC 60068-2-415, IEC 60068-2-416, IEC 60068-2-417, IEC 60068-2-418, IEC 60068-2-419, IEC 60068-2-420, IEC 60068-2-421, IEC 60068-2-422, IEC 60068-2-423, IEC 60068-2-424, IEC 60068-2-425, IEC 60068-2-426, IEC 60068-2-427, IEC 60068-2-428, IEC 60068-2-429, IEC 60068-2-430, IEC 60068-2-431, IEC 60068-2-432, IEC 60068-2-433, IEC 60068-2-434, IEC 60068-2-435, IEC 60068-2-436, IEC 60068-2-437, IEC 60068-2-438, IEC 60068-2-439, IEC 60068-2-440, IEC 60068-2-441, IEC 60068-2-442, IEC 60068-2-443, IEC 60068-2-444, IEC 60068-2-445, IEC 60068-2-446, IEC 60068-2-447, IEC 60068-2-448, IEC 60068-2-449, IEC 60068-2-450, IEC 60068-2-451, IEC 60068-2-452, IEC 60068-2-453, IEC 60068-2-454, IEC 60068-2-455, IEC 60068-2-456, IEC 60068-2-457, IEC 60068-2-458, IEC 60068-2-459, IEC 60068-2-460, IEC 60068-2-461, IEC 60068-2-462, IEC 60068-2-463, IEC 60068-2-464, IEC 60068-2-465, IEC 60068-2-466, IEC 60068-2-467, IEC 60068-2-468, IEC 60068-2-469, IEC 60068-2-470, IEC 60068-2-471, IEC 60068-2-472, IEC 60068-2-473, IEC 60068-2-474, IEC 60068-2-475, IEC 60068-2-476, IEC 60068-2-477, IEC 60068-2-478, IEC 60068-2-479, IEC 60068-2-480, IEC 60068-2-481, IEC 60068-2-482, IEC 60068-2-483, IEC 60068-2-484, IEC 60068-2-485, IEC 60068-2-486, IEC 60068-2-487, IEC 60068-					

Servo Motor Specifications

Medium high / High Inertia Series

Model: ECMA Series	FΔ13			FΔ18
	08	13	18	30
Rated power (kW)	0.85	1.3	1.8	3.0
Rated torque (N·m) ¹	5.41	8.34	11.48	19.10
Maximum torque (N·m)	13.8	23.3	28.7	57.29
Rated speed (r/min)		1500		
Maximum speed (r/min)		3000		
Rated current (A)	7.1	12.6	13	19.4
Maximum current (A)	19.4	38.6	36	58.2
Power rating (kW/s)	21.52	34.78	52.93	66.4
Rotor inertia (x10-4kg·m ²)(without brake)	13.6	20	24.9	54.95
Mechanical constant (ms)	2.43	1.62	1.7	1.28
Torque constant-KT (N·m/A)	0.76	0.66	0.88	0.98
Voltage constant-KE(mV)/(r/min)	29.2	24.2	32.2	35.0
Armature resistance (Ohm)	0.38	0.124	0.185	0.077
Armature inductance (mH)	4.77	1.7	2.6	1.27
Electric constant (ms)	12.55	13.71	14.05	16.5
Insulation class	Class A (UL), Class B (CE)			
Insulation resistance	>100 MΩ, 500 V _{DC}			
Insulation strength	1.8 kV _{AC} , 1 sec			
Weight (kg) (without brake)	8.6	9.4	10.5	18.5
Weight (kg) (with brake)	10.0	10.8	11.9	22.5
Max. radial shaft load (N)	490	490	490	1470
Max. thrust shaft load (N)	98	98	98	490
Power rating (kW/s) (with brake)	19.78	32.66	50.3	63.9
Rotor inertia (x10-4kg·m ²) (with brake)	14.8	21.3	26.2	57.06
Mechanical constant (ms) (with brake)	2.65	1.73	1.79	1.33
Brake holding torque [Nt·m (min)] ²	10.0	10.0	10.0	25.0
Brake power consumption (at 20°C) [W]	19.0	19.0	19.0	20.4
Brake release time [ms (Max)]	10	10	10	10
Brake pull-in time [ms (Max)]	70	70	70	70
Vibration grade (μm)	15			
Operating temperature (°C)	0°C~ 40°C			
Storage temperature (°C)	-10°C to 80°C (-14°F to 176°F)			
Operating humidity	20 to 90% RH (non-condensing)			
Storage humidity	20 to 90% RH (non-condensing)			
Vibration capacity	2.5G			
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))			
Approvals				

Footnote:

*1 Rate torque values are continuous permissible values at 0 ~ 40° C ambient temperature when attaching with the sizes of heatsinks listed below:
ECMA-__04 / 06 / 08 : 260mm x 250mm x 6mm
ECMA-__10 : 300mm x 300mm x 12mm
ECMA-__13 : 400mm x 400mm x 20mm
ECMA-__18 : 550mm x 550mm x 30mm
ECMA-__22 : 650mm x 650mm x 35mm

Material type : Aluminum – F40, F60, F80, F100, F130, F180
*2 The holding brake is used to hold the motor shaft, not for braking the rotation.
Never use it for decelerating or stopping the machine.

Servo Motor Specifications

High Inertia Series

Model: ECMA Series	CΔ06	CΔ08
	04 □ H	07 □ H
Rated power (kW)	0.4	0.75
Rated torque (N·m) ¹	1.27	2.39
Maximum torque (N·m)	3.82	7.16
Rated speed (r/min)	3000	
Maximum speed (r/min)	5000	
Rated current (A)	2.6	5.1
Maximum current (A)	7.8	15.3
Power rating (kW/s)	21.7	19.63
Rotor inertia (x10 ⁻⁴ kg·m ²)(without brake)	0.743	2.91
Mechanical constant (ms)	1.42	1.6
Torque constant-KT (N·m/A)	0.49	0.47
Voltage constant-KE(mV/(r/min))	17.4	17.2
Armature resistance (Ohm)	1.55	0.42
Armature inductance (mH)	6.71	3.53
Electric constant (ms)	4.3	8.36
Insulation class	Class A (UL), Class B (CE)	
Insulation resistance	>100 MΩ, 500 V _{DC}	
Insulation strength	1.8 kV _{AC} , 1 sec	
Weight (kg) (without brake)	1.8	3.4
Weight (kg) (with brake)	2.2	3.9
Max. radial shaft load (N)	196	245
Max. thrust shaft load (N)	68	98
Power rating (kW/s) (with brake)	21.48	19.3
Rotor inertia (x10 ⁻⁴ kg·m ²) (with brake)	0.751	2.96
Mechanical constant (ms) (with brake)	1.43	1.62
Brake holding torque [Nt·m (min)] ²	1.3	2.5
Brake power consumption (at 20°C) [W]	6.5	8.2
Brake release time [ms (Max)]	10	10
Brake pull-in time [ms (Max)]	70	70
Vibration grade (μm)	15	
Operating temperature (°C)	0 °C~ 40 °C	
Storage temperature (°C)	-10 °C to 80 °C (-14 °F to 176 °F)	
Operating humidity	20 to 90% RH (non-condensing)	
Storage humidity	20 to 90% RH (non-condensing)	
Vibration capacity	2.5G	
IP Rating	IP65 (when waterproof connectors are used, or when an oil seal is used to be fitted to the rotating shaft (an oil seal model is used))	
Approvals		

Footnote:

*1 Rate torque values are continuous permissible values at 0 ~ 40° C ambient temperature when attaching with the sizes of heatsinks listed below:

ECMA-04 / 06 / 08 : 250mm x 250mm x 6mm

ECMA-10 : 300mm x 300mm x 12mm

ECMA-13 : 400mm x 400mm x 20mm

ECMA-18 : 550mm x 550mm x 30mm

ECMA-22 : 650mm x 650mm x 35mm


Material type : Aluminum – F40, F60, F80, F100, F130, F180

*2 The holding brake is used to hold the motor shaft, not for braking the rotation.

Never use it for decelerating or stopping the machine.

Servo Motor Dimensions

Motors - Frame Size 86mm and below (Units: mm)

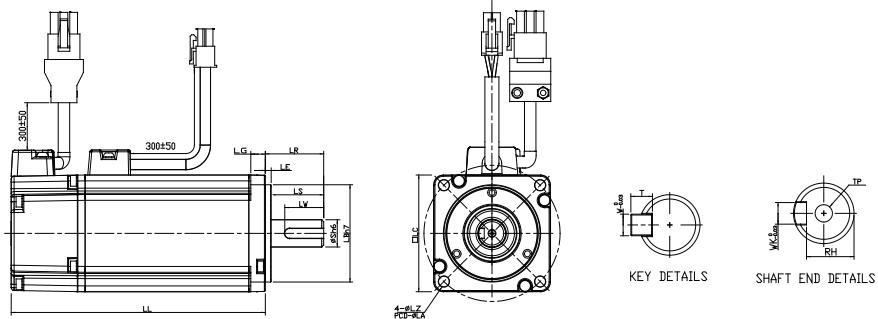


Unit: mm

Model	C △ 0401 □ S	C △ 0602 □ S	C △ 0604 □ S	C △ 0604 □ H	C △ 0804 □ 7	C △ 0807 □ S	C △ 0807 □ H	C △ 0907 □ S	C △ 0910 □ S
LC	40	60	60	60	80	80	80	86	86
LZ	4.5	5.5	5.5	5.5	6.6	6.6	6.6	6.6	6.6
LA	46	70	70	70	90	90	90	100	100
S	8 (+0 -0.009)	14 (-0.011)	14 (+0 -0.011)	14 (-0.011)	14 (+0 -0.011)	19 (+0 -0.013)	19 (+0 -0.013)	16 (-0.011)	16 (+0 -0.011)
LB	30 (+0 -0.021)	50 (+0 -0.025)	50 (+0 -0.025)	50 (+0 -0.025)	70 (+0 -0.030)	70 (+0 -0.030)	70 (+0 -0.030)	80 (+0 -0.030)	80 (+0 -0.030)
LL (without brake)	100.6	105.5	130.7	145.8	112.3	138.3	151.1	130.2	153.2
LL (with brake)	136.8	141.6	166.8	176.37	152.8	178	189	161.3	184.3
LS	20	27	27	27	27	32	32	30	30
LR	25	30	30	30	30	35	35	35	35
LE	2.5	3	3	3	3	3	3	3	3
LG	5	7.5	7.5	7.5	8	8	8	8	8
LW	16	20	20	20	20	25	25	20	20
RH	6.2	11	11	11	11	15.5	15.5	13	13
WK	3	5	5	5	5	6	6	5	5
W	3	5	5	5	5	6	6	5	5
T	3	5	5	5	5	6	6	5	5
TP	M3 Depth 8	M4 Depth 15	M4 Depth 15	M4 Depth 15	M4 Depth 15	M6 Depth 20	M6 Depth 20	M5 Depth 15	M5 Depth 15




- 1) Dimensions are in millimeters. Actual measured values are in metric units.
 2) Dimensions of the servo motor may be updated without prior notice.
 3) The boxes (□) in the model names represent shaft end/brake or the number of oil seal.
 4) The boxes (△) in the model names represent encoder types (△ =1: Incremental encoder, 20-bit; △ =2: Incremental encoder, 17-bit).

Speed-Torque Curves (T-N Curves)

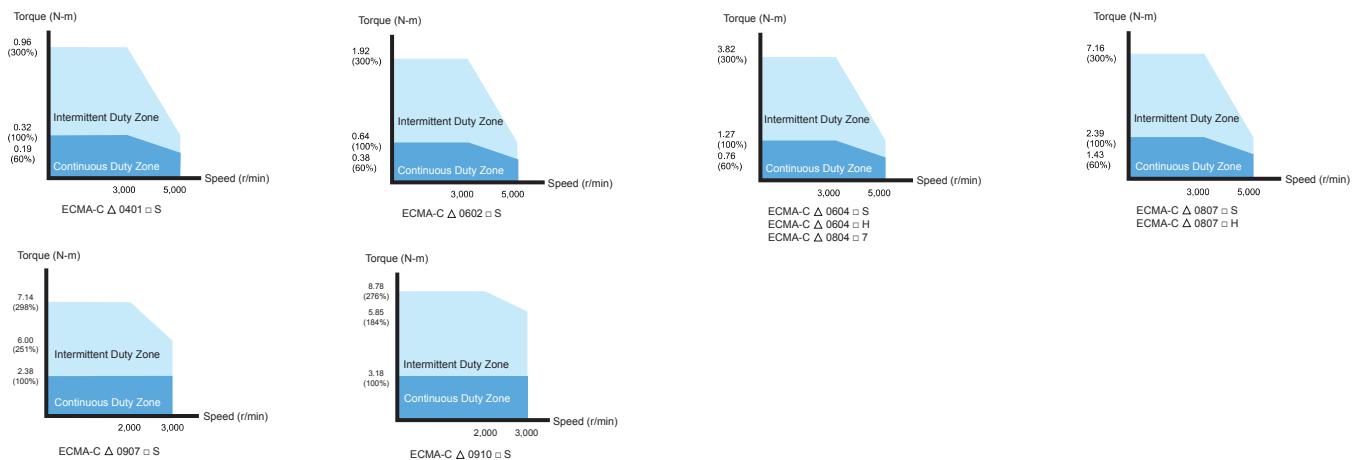

Motors - Frame Size 100mm ~ 130mm (Units: mm)

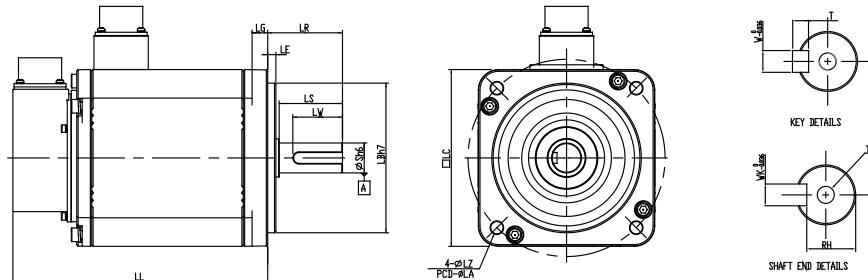


Model	C △ 1010 □ S	C △ 1020 □ S	C △ 1330 □ 4	E △ 1305 □ S	E △ 1310 □ S	E △ 1315 □ S
LC	100	100	130	130	130	130
LZ	9	9	9	9	9	9
LA	115	115	145	145	145	145
S	22 (+0 -0.013)	22 (+0 -0.013)	24 (+0 -0.013)	22 (+0 -0.013)	22 (+0 -0.013)	22 (+0 -0.013)
LB	95 (+0 -0.035)	95 (+0 -0.035)	110 (+0 -0.035)	110 (+0 -0.035)	110 (+0 -0.035)	110 (+0 -0.035)
LL (不帶煞車)	153.3	199	187.5	147.5	147.5	167.5
LL (帶煞車)	192.5	226	216	183.5	183.5	202
LS	37	37	47	47	47	47
LR	45	45	55	55	55	55
LE	5	5	6	6	6	6
LG	12	12	11.5	11.5	11.5	11.5
LW	32	32	36	36	36	36
RH	18	18	20	18	18	18
WK	8	8	8	8	8	8
W	8	8	8	8	8	8
T	7	7	7	7	7	7
TP	M6 Depth 20	M6 Depth 20	M6 Depth 20	M6 Depth 20	M6 Depth 20	M6 Depth 20




- 1) Dimensions are in millimeters. Actual measured values are in metric units.
- 2) Dimensions of the servo motor may be updated without prior notice.
- 3) The boxes (□) in the model names represent shaft end/brake or the number of oil seal.
- 4) The boxes (△) in the model names represent encoder types (△=1: Incremental encoder, 20-bit; △=2: Incremental encoder, 17-bit).

Speed-Torque Curves (T-N Curves)

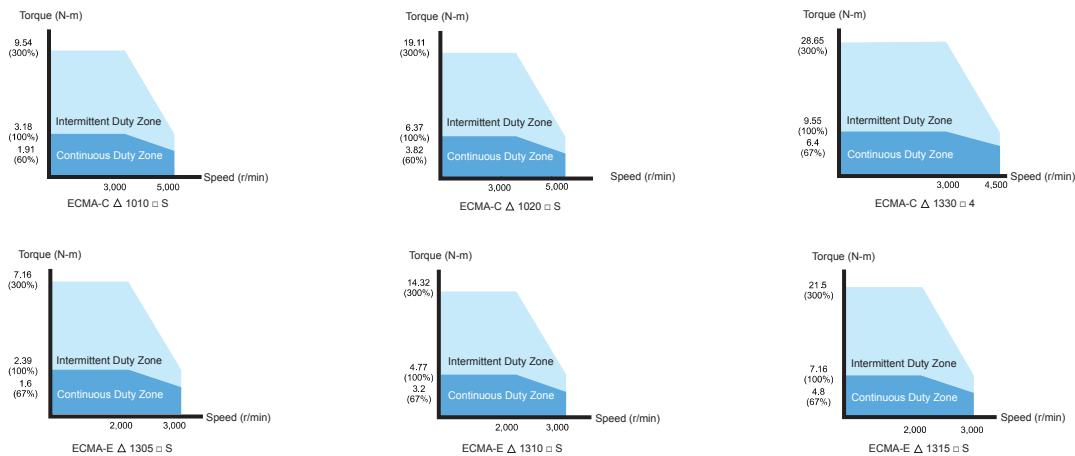

Servo Motor Dimensions

Motors - Frame Size 100mm ~ 130mm (Units: mm)

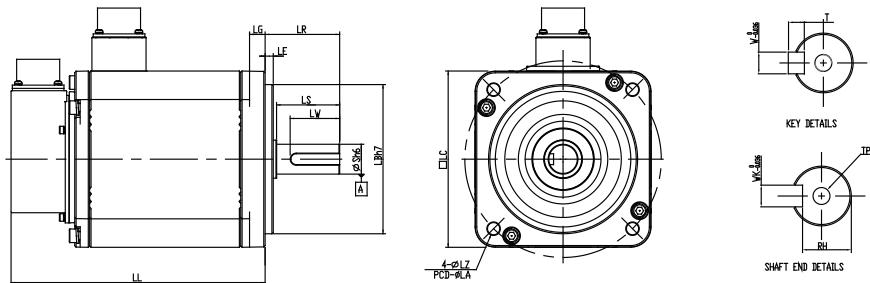


Unit: mm

Model	E △ 1320 □ S	F △ 1308 □ S	F △ 1313 □ S	F △ 1318 □ S	G △ 1303 □ S	G △ 1306 □ S	G △ 1309 □ S
LC	130	130	130	130	130	130	130
LZ	9	9	9	9	9	9	9
LA	145	145	145	145	145	145	145
S	22 (+ ⁰ -0.013)						
LB	110 (+ ⁰ -0.035)						
LL (without brake)	187.5	152.5	187.5	202	147.5	147.5	163.5
LL (with brake)	216	181	216	230.7	183.5	183.5	198
LS	47	47	47	47	47	47	47
LR	55	55	55	55	55	55	55
LE	6	6	6	6	6	6	6
LG	11.5	11.5	11.5	11.5	11.5	11.5	11.5
LW	36	36	36	36	36	36	36
RH	18	18	18	18	18	18	18
WK	8	8	8	8	8	8	8
W	8	8	8	8	8	8	8
T	7	7	7	7	7	7	7
TP	M6 Depth 20						




- 1) Dimensions are in millimeters. Actual measured values are in metric units.
 2) Dimensions of the servo motor may be updated without prior notice.
 3) The boxes (□) in the model names represent shaft end/brake or the number of oil seal.
 4) The boxes (△) in the model names represent encoder types (△ =1: Incremental encoder, 20-bit; △ =2: Incremental encoder, 17-bit).

Speed-Torque Curves (T-N Curves)

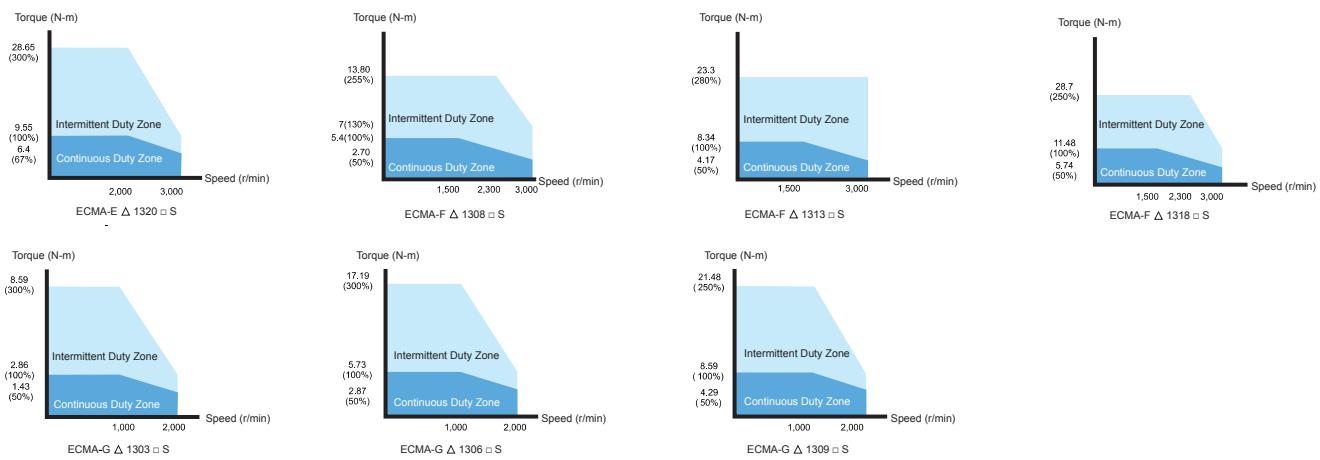

Motors - Frame Size 180mm (Units: mm)

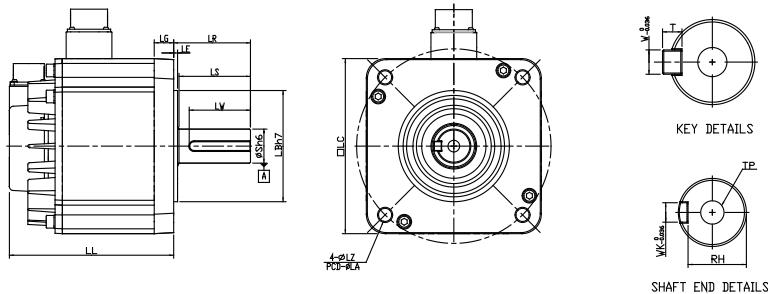


Unit: mm

Model	E \triangle 1820 \square S	E \triangle 1830 \square S	F \triangle 1830 \square S	E \triangle 1835 \square S
LC	180	180	180	180
LZ	13.5	13.5	13.5	13.5
LA	200	200	200	200
S	35 ($^{+0}_{-0.016}$)	35 ($^{+0}_{-0.016}$)	35 ($^{+0}_{-0.016}$)	35 ($^{+0}_{-0.016}$)
LB	114.3 ($^{+0}_{-0.035}$)	114.3 ($^{+0}_{-0.035}$)	114.3 ($^{+0}_{-0.035}$)	114.3 ($^{+0}_{-0.035}$)
LL (without brake)	169	202.1	202.1	202.1
LL (with brake)	203.1	235.3	235.3	235.3
LS	73	73	73	73
LR	79	79	79	79
LE	4	4	4	4
LG	20	20	20	20
LW	63	63	63	63
RH	30	30	30	30
WK	10	10	10	10
W	10	10	10	10
T	8	8	8	8
TP	M12 Depth 25	M12 Depth 25	M12 Depth 25	M12 Depth 25



- 1) Dimensions are in millimeters. Actual measured values are in metric units.
- 2) Dimensions of the servo motor may be updated without prior notice.
- 3) The boxes (\square) in the model names represent shaft end/brake or the number of oil seal.
- 4) The boxes (\triangle) in the model names represent encoder types ($\triangle = 1$: Incremental encoder, 20-bit; $\triangle = 2$: Incremental encoder, 17-bit).

Speed-Torque Curves (T-N Curves)

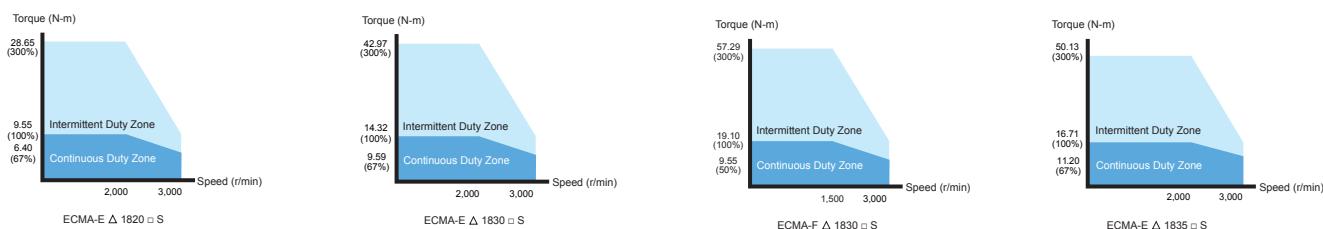

Optional Accessories

Power Cables

- 3m and 5m standard cables are available.
- Individual connectors are also provided for different demands.
- Two types are selectable: with brake and without brake.



CN1 I/O Connectors

- Used to connect to external (host) controller
- Delta Part Number: ASDBCNDSD0044



CN1 Convenient Connector

- Delta Part Number: ASD-IF-DS4444



Encoder Cables

- 3m and 5m standard cables are available.
- Individual connectors are also provided for different demands.





Regenerative Resistors

- Two kinds of regenerative resistors are available, 400W/40Ω and 1kw/20Ω.



Terminal Block Modules

- 0.5m connection cable is provided for saving on installation space.
- Delta Part Number: ASD-MDDS4444



RS-485 Connectors

- Used to connect multiple ASDA series products by RS-485 interface through Modbus serial communication.
- Delta Part Number: ASD-CNIE0B06



ASD-Soft Software

Communication Cables (for PC)

- Delta Part Number: ASD-CNUS0A08




The figures are for illustration purposes only. Actual models may differ slightly in appearance from illustrations provided.


Optional Accessories

Power Connectors

ASDBCAPW0000




ASD-CAPW1000

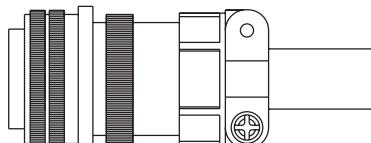


3106A-20-18S

ASDBCAPW0100




ASD-CAPW2000

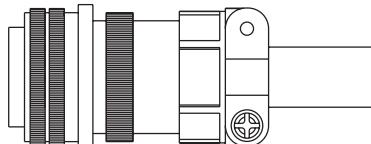

3106A-24-11S


Power Cables

ASDBCAPW0203/0205

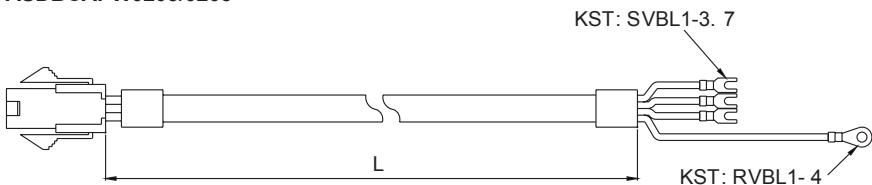

Item	Part No.	L	
		mm	inch
1	ASDBCAPW0203	3000 ± 50	118 ± 2
2	ASDBCAPW0205	5000 ± 50	197 ± 2


ASDBCAPW0303/0305

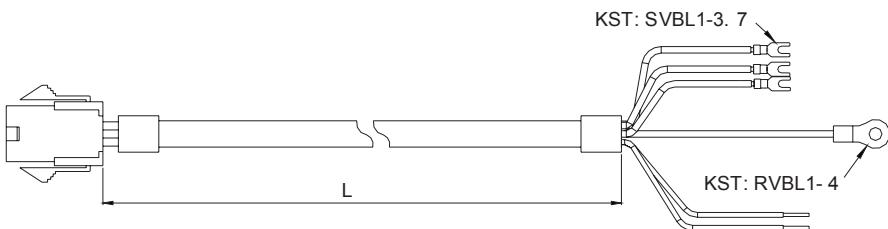

Item	Part No.	L	
		mm	inch
1	ASDBCAPW0303	3000 ± 50	118 ± 2
2	ASDBCAPW0305	5000 ± 50	197 ± 2


Power Cables

ASDBCAPW1203/1205

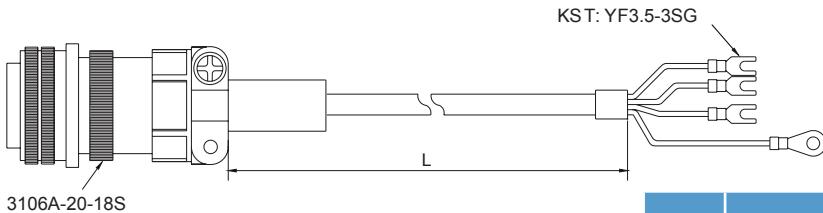


Item	Part No.	Straight	L	
			mm	inch
1	ASDBCAPW1203	3106A-20-18S	3000 ± 50	118 ± 2
2	ASDBCAPW1205	3106A-20-18S	5000 ± 50	197 ± 2

ASDBCAPW1303/1305

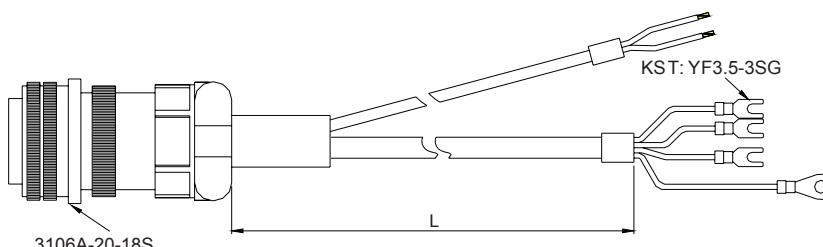


Item	Part No.	Straight	L	
			mm	inch
1	ASDBCAPW1303	3106A-20-18S	3000 ± 50	118 ± 2
2	ASDBCAPW1305	3106A-20-18S	5000 ± 50	197 ± 2

ASD-CAPW2203/2205

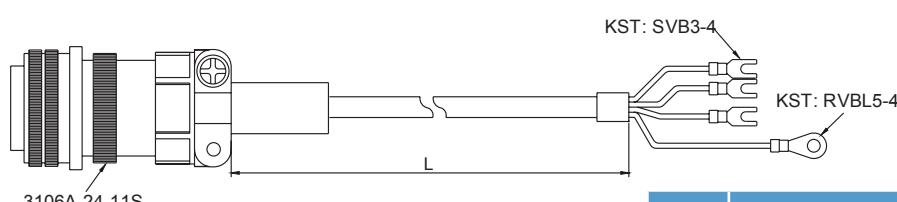

Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW2203	3106A-24-11S	3000 ± 50	118 ± 2
2	ASD-CAPW2205	3106A-24-11S	5000 ± 50	197 ± 2

ASD-CAPW2303/2305


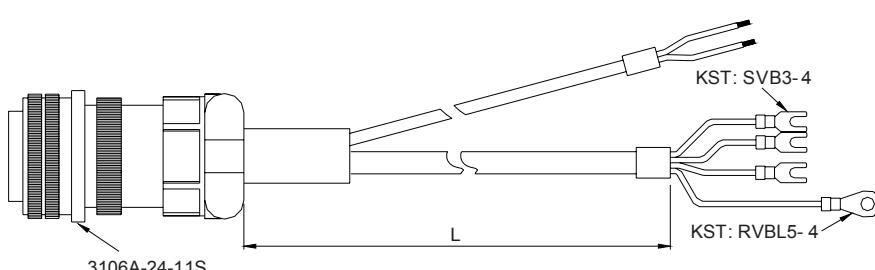


Item	Part No.	Straight	L	
			mm	inch
1	ASD-CAPW2303	3106A-24-11S	3000 ± 50	118 ± 2
2	ASD-CAPW2305	3106A-24-11S	5000 ± 50	197 ± 2


Optional Accessories

Encoder Connectors


ASDBCAEN0000




D-SUB Connector 9P



ASDBCAEN1000

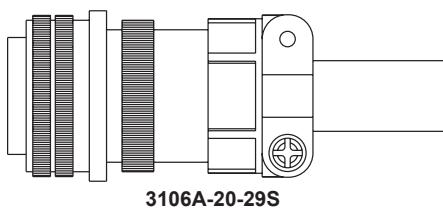


3106A-20-29S



D-SUB Connector 9P


Encoder Cables

ASDBCAEN0003/0005

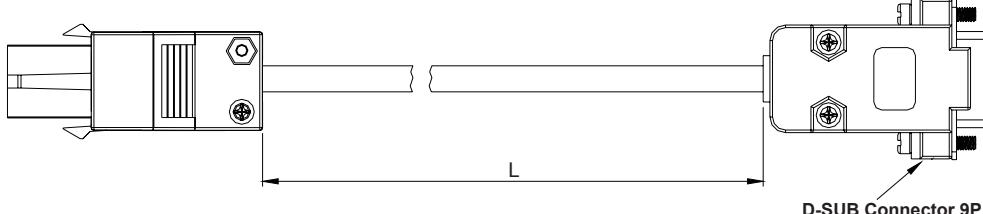

Item	Part No.	L	
		mm	inch
1	ASDBCAEN0003	3000 ± 50	118 ± 2
2	ASDBCAEN0005	5000 ± 50	197 ± 2


ASDBCAEN1003/1005

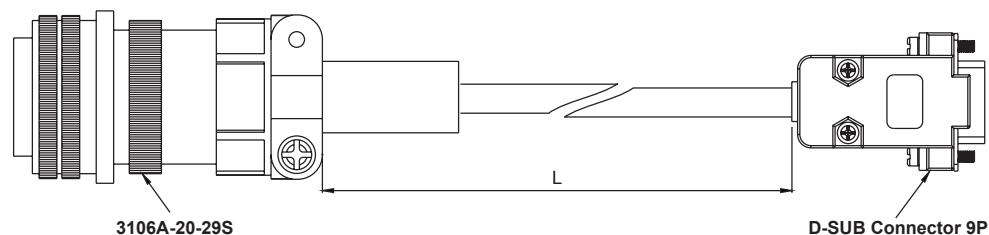


Item	Part No.	Straight	L	
			mm	inch
1	ASDBCAEN1003	3106A-20-29S	3000 ± 50	118 ± 2
2	ASDBCAEN1005	3106A-20-29S	5000 ± 50	197 ± 2

I/O Signal Connector

ASD-BCNDS0044
D-SUB 44 PIN PLUG





ASDBCAEN1000
D-SUB 15 PIN PLUG




RS-485 Connector Dimensions are in mm

ASD-CNIE0B06

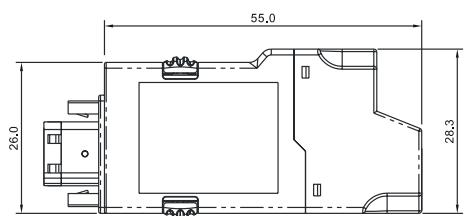

Communication Cable between Drive and Computer (for PC) Dimensions are in mm


ASD-CNUS0A08

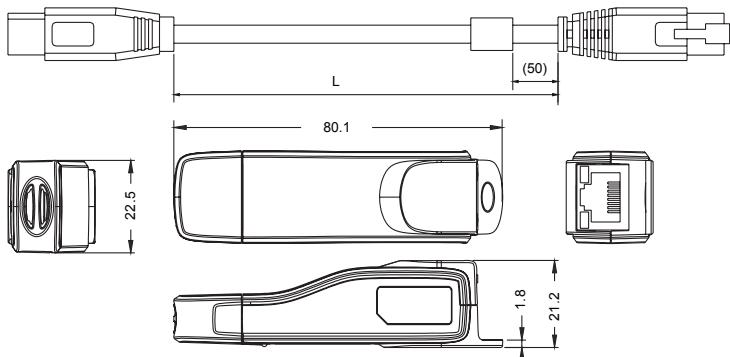

Title	Part No.	Part No.
Cable	L	3000 ± 100 mm 118 ± 4 inch
Connector	RJ connector USB connector	RJ-45 A-type (USB V2.0)


Voltage Output Cable (Analog Signal) Dimensions are in mm

3864471800

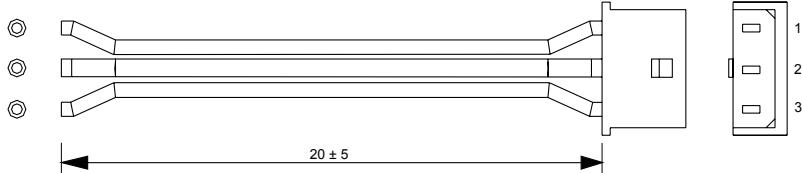

Terminal Block Module Dimensions are in mm

ASD-MDDS4444

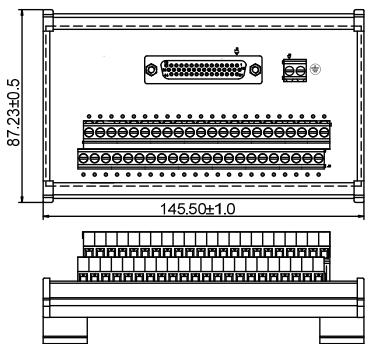

Accessories Combinations

100W Servo Drive and 100W Low Inertia Servo Motor

Servo Drive	ASD-B2-0121-B
Low Inertia Servo Motor	ECMA-C △ 0401 □ S
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

200W Servo Drive and 200W Low Inertia Servo Motor

Servo Drive	ASD-B2-0221-B
Low Inertia Servo Motor	ECMA-C △ 0602 □ S
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

400W Servo Drive and 400W Low Inertia Servo Motor

Servo Drive	ASD-B2-0421-B
Low Inertia Servo Motor	ECMA-C △ 0604 □ S ECMA-C △ 0804 □ 7 ECMA-CM0604PS
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

400W Servo Drive and 400W High Inertia Servo Motor

Servo Drive	ASD-B2-0421-B
High Inertia Servo Motor	ECMA-C △ 0604 □ H
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

400W Servo Drive and 500W Medium Inertia Servo Motor

Servo Drive	ASD-B2-0421-B
Medium Inertia Servo Motor	ECMA-E △ 1305□S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Incremental Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

400W Servo Drive and 300W High Inertia Servo Motor

Servo Drive	ASD-B2-0421-B
High Inertia Servo Motor	ECMA-G △ 1303□S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

750W Servo Drive and 600W High Inertia Servo Motor

Servo Drive	ASD-B2-0721-B
High Inertia Servo Motor	ECMA-G △ 1306□S ECMA-GM1306PS
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

750W Servo Drive and 750W Low Inertia Servo Motor

Servo Drive	ASD-B2-0721-B
Low Inertia Servo Motor	ECMA-C △ 0807□S ECMA-C △ 0907□7 ECMA-CM0807PS
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

Accessories Combinations

750W Servo Drive and 750W High Inertia Servo Motor

Servo Drive	ASD-B2-0721-B
High Inertia Servo Motor	ECMA-C △ 0807 □ H
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

1kW Servo Drive and 850W Low Inertia Servo Motor

Servo Drive	ASD-B2-1021-B
Low Inertia Servo Motor	ECMA-F △ 1308 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

1kW Servo Drive and 1kW Low Inertia Servo Motor

Servo Drive	ASD-B2-1021-B
Low Inertia Servo Motor	ECMA-C △ 1010 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

1kW Servo Drive and 1kW Low Inertia Servo Motor

Servo Drive	ASD-B2-1021-B
Low Inertia Servo Motor	ECMA-C △ 0910 □ S
Power Cables (Without Brake)	ASDBCAPW020X
Power Connectors (Without Brake)	ASDBCAPW0000
Power Cables (With Brake)	ASDBCAPW030X
Power Connectors (With Brake)	ASDBCAPW0100
Incremental Encoder Cables	ASDBCAEN000X
Encoder Connectors	ASDBCAEN0000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

1kW Servo Drive and 1kW Medium Inertia Servo Motor

Servo Drive	ASD-B2-1021-B
Medium Inertia Servo Motor	ECMA-E △ 1310 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

1kW Servo Drive and 900W High Inertia Servo Motor

Servo Drive	ASD-B2-1021-B
High Inertia Servo Motor	ECMA-G △ 1309 □ S ECMA-GM1309PS
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

1.5kW Servo Drive and 1.5kW Medium Inertia Servo Motor

Servo Drive	ASD-B2-1521-B
Medium Inertia Servo Motor	ECMA-E △ 1315 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

2kW Servo Drive and 2kW Low Inertia Servo Motor

Servo Drive	ASD-B2-2023-B
Low Inertia Servo Motor	ECMA-C △ 1020 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASDBCAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

Accessories Combinations

2kW Servo Drive and 2kW Medium Inertia Servo Motor

Servo Drive	ASD-B2-2023-B
Medium Inertia Servo Motor	ECMA-E △ 1320 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

2kW Servo Drive and 2kW Medium Inertia Servo Motor

Servo Drive	ASD-B2-2023-B
Medium Inertia Servo Motor	ECMA-E △ 1820 □ S
Power Cables (Without Brake)	ASD-CAPW220X
Power Cables (With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

2kW Servo Drive and 1.3kW Medium High Inertia Servo Motor

Servo Drive	ASD-B2-2023-B
Medium High Inertia Servo Motor	ECMA-F11313 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

2kW Servo Drive and 1.8kW Medium High Inertia Servo Motor

Servo Drive	ASD-B2-2023-B
Medium High Inertia Servo Motor	ECMA-F11318 □ S
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

3kW Servo Drive and 3kW Low Inertia Servo Motor

Servo Drive	ASD-B2-3023-B
Low Inertia Servo Motor	ECMA-C △ 1330 □ 4
Power Cables (Without Brake)	ASDBCAPW120X
Power Cables (With Brake)	ASDBCAPW130X
Power Connectors	ASD-CAPW1000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

3kW Servo Drive and 3kW Medium Inertia Servo Motor

Servo Drive	ASD-B2-3023-B
Medium Inertia Servo Motor	ECMA-E △ 1830 □ S
Power Cables (Without Brake)	ASD-CAPW220X
Power Cables (With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

3kW Servo Drive and 3.5kW Medium Inertia Servo Motor

Servo Drive	ASD-B2-3023-B
Medium Inertia Servo Motor	ECMA-E △ 1835 □ S
Power Cables (Without Brake)	ASD-CAPW220X
Power Cables (With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

3kW Servo Drive and 3kW Medium High Inertia Servo Motor

Servo Drive	ASD-B2-3023-B
Medium High Inertia Servo Motor	ECMA-F △ 1830 □ S
Power Cables (Without Brake)	ASD-CAPW220X
Power Cables (With Brake)	ASD-CAPW230X
Power Connectors	ASD-CAPW2000
Encoder Cables	ASDBCAEN100X
Encoder Connectors	ASDBCAEN1000

(X=3 indicates that the cable length is 3m; X=5 indicates that the cable length is 5m)

Other Accessories (for ASDA-B2 series all models)

Description	Delta Part Number
Communication Cable between Servo Drive and Computer	ASD-CARS0003
Regenerative Resistor 400W 100Ω	BR400W040
Regenerative Resistor 1kW 1000Ω	BR1K0W020



Smarter. Greener. Together.

Industrial Automation Headquarters

Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan Dist.
Taoyuan City 33068, Taiwan
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

Asia

Delta Electronics (Jiangsu) Ltd.

Wujiang Plant 3
1688 Jiangxing East Road,
Wujiang Economic Development Zone
Wujiang City, Jiang Su Province,
People's Republic of China (Post code: 215200)
TEL: 86-512-6340-3008 / FAX: 86-769-6340-7290

Delta Greentech (China) Co., Ltd.

238 Min-Xia Road, Pudong District,
ShangHai, P.R.C.
Post code : 201209
TEL: 86-21-58635678 / FAX: 86-21-58630003

Delta Electronics (Japan), Inc.

Tokyo Office
2-1-14 Minato-ku Shibadaimon,
Tokyo 105-0012, Japan
TEL: 81-3-5733-1111 / FAX: 81-3-5733-1211

Delta Electronics (Korea), Inc.

1511, Byucksan Digital Valley 6-cha, Gasan-dong,
Geumcheon-gu, Seoul, Korea, 153-704
TEL: 82-2-515-5303 / FAX: 82-2-515-5302

Delta Electronics Int'l (S) Pte Ltd

4 Kaki Bukit Ave 1, #05-05, Singapore 417939
TEL: 65-6747-5155 / FAX: 65-6744-9228

Delta Electronics (India) Pvt. Ltd.

Plot No 43 Sector 35, HSIIDC
Gurgaon, PIN 122001, Haryana, India
TEL : 91-124-4874900 / FAX : 91-124-4874945

Americas

Delta Products Corporation (USA)

Raleigh Office
P.O. Box 12173,5101 Davis Drive,
Research Triangle Park, NC 27709, U.S.A.
TEL: 1-919-767-3800 / FAX: 1-919-767-8080

Delta Greentech (Brasil) S.A

Sao Paulo Office
Rua Itapeva, 26 - 3º andar Edificio Itapeva One-Bela Vista
01332-000-São Paulo-SP-Brazil
TEL: +55 11 3568-3855 / FAX: +55 11 3568-3865

Europe

Deltronics (The Netherlands) B.V.

Eindhoven Office
De Witbogt 15, 5652 AG Eindhoven, The Netherlands
TEL: 31-40-2592850 / FAX: 31-40-2592851

*We reserve the right to change the information in this catalogue without prior notice.